



RUD Ketten
Rieger & Dietz GmbH u. Co. KG

RUD Ketten Rieger & Dietz GmbH u. Co. KG 73428 Aalen

To whom it may concerned

Friedensinsel
73432 Aalen/Germany
Phone +49 7361 504-0
Fax +49 7361 504-1450
rudketten@rud.com
www.rud.com

Your reference

Our reference
FA/MUE

Direct phone
504-1821
Direct Fax
504-1523
johannes.mueck@rud.com

Date
May 2017

LETTER OF AUTHORIZATION

This is to certify that the following company is authorized to act as

REPRESENTATION
IN THE FIELD OF CHAIN EQUIPMENT FOR
COAL POWER PLANTS IN MALAYSIA

of RUD Ketten Rieger & Dietz GmbH u. Co. KG, 73432 Aalen, Germany in Malaysia:

Mectrid Integrated Technology Sdn. Bhd.
Lot No. 70, Taman PKNK, Tikam Batu,
08600 Sungai Petani, Kedah
Malaysia

Registered as:
limited partnership
with headquarters in
Aalen-Unterkochen
at county court
Ulm HRA 500160

Fully liable partner:
RUD-Kettenfabrik Gebr. Rieger GmbH
with headquarters in Aalen-Unterkochen
registered at county court
Ulm HRB 500065

Board of directors
Dr. Hansjoerg Rieger
Joerg S. Rieger, Ph.D.
Johannes W. Rieger
Benjamin T. Rieger

Bank connections:
VR Bank Aalen Nr. 104 445 009 BLZ 614 901 50
Deutsche Bank AG Nr. 16 326 37 BLZ 613 700 86
KSK Ostalb Nr. 110 084 741 BLZ 614 500 50
Postbank, Stuttgart Nr. 42 03 706 BLZ 600 100 70

VAT Number: DE 144 651102

This authorization covers RUD chain systems for coal power plant applications, palm oil plants, biomass energy systems, waste-to-energy plants.

Your sincerely,

RUD Ketten
Rieger & Dietz GmbH u. Co. KG



Johannes Mück
Dipl.-Ing. (FH)

Vertrieb Förderanlagen / Sales Conveyor Systems
Area Sales Manager

Tel +49 7361 504-1281
Fax +49 7361 504-1523

johannes.mueck@rud.com


RUD CONVEYOR SYSTEMS

ENG


FOR HORIZONTAL, VERTICAL AND INCLINED CONVEYORS

EDITION_1






Do you
experience
any of these
conveyor issues




Is your chain equipment
wearing out too quickly?

The new RUD chain grades
offer optimal wear resistance.
> [More on page 5](#)




Are your chains or the teeth of the
gears suddenly breaking? Is your
system coming to a standstill due
to this? How much is the damage if
you have to shut down the system
as a result of this?

The new chain grades offer up to 28 %
improvement in breaking force. Your system
will run safer and the risk of breaking will
be minimised.. > [More on page 6](#)




Are you experiencing
difficulties when
installing components?

Then try our installation-friendly innovations such
as **DUOMOUNT**® or **2win**.
> [More on page 25 and 41](#)



Are you missing
an on-site
contact person?

Then contact our nearest branch.
> [More at www.rud.com](http://www.rud.com) (units & locations)



Do you wish for
more technical
consultation and
assistance?

Then simply ask us. Directly contact our engineers and
send us your challenges related to the conveyor system.
> conveyor@rud.com
> [Technical questionnaires from page 60](#)



Can you imagine what it would be like to work
together with a company that is competent to
solve all your challenges related to the conveyor
system and moreover guarantees a high level of
service and commercial support?


Then contact us at the
german headquarters
> conveyor@rud.com
Tel. 0049 / 7361 50 41 457
Fax 0049 / 7361 50 41 523




Our Product range

- **CRATOS conveyor system for energy extraction** 4
- **BULKOS conveyor system for bulk materials** 6
- **Our conveyor systems at a glance**
 - Conveyor systems for horizontal conveyance 8
 - Conveyor systems for vertical conveyance 9
- **RUD chain technology**
 - New special products 10
 - Our strengths at a glance 12
- **Round link steel chains – the new RUD specifications** 13
- **Chain connectors**
 - RSP, FL, VK 16
- **System sprocket wheel**
 - **Sprocket wheel**
 - single, multi-part 18
 - **Our tip:** Tooth segments with increased pitch circle diameter 20
 - **Attachments**
 - FM 21
 - MEZ-Z, F 22
 - SSR 23
 - SSRF 24
 - Duomount 25
 - **Scraper**
 - Safer scraper operation with paired RUD chain strands 26
 - Scraper – individual specifications 26
 - Usage examples for RUD scraper 27
 - **Reversing wheels** 30
 - **Submerged overhung idler (SOI)** 31

- **System pocket wheel**
 - **Pocket wheel**
 - single, multi-part 33
 - **Attachments**
 - MEE-T 34
 - MEZ-T 35
- **Bucket attachments**
 - Our bucket attachment systems at a glance 36
- **Chain bucket elevators** 37
 - **System 2win / SWA**
 - Bucket attachment 2win 39
 - Side wall attachment SWA 40
 - Chain wheels 41
 - **System 65**
 - Bucket attachment system 65 42
 - Reversing wheel 43
 - Sprocket wheel 44
- **Central chain**
 - RU80, RU150, RU200 45
 - Drive wheel, Tension sprocket 47
- **Belt type bucket elevator** 48
- **Trough chain conveyor** 52
- **FORKY forked chain**
 - Single & double strand 54
 - Attachments, components, wheels, sprockets, 55
 - Trough chain conveyor with forked chain 56
- **Screw conveyor** 58
- **General instructions for installation and operation** 60
- **Maintenance and monitoring** 61
- **SOI dimension sheet** 62
- **Questionnaires** 65
- **Conveyor and Drives (sectional overview)** 71

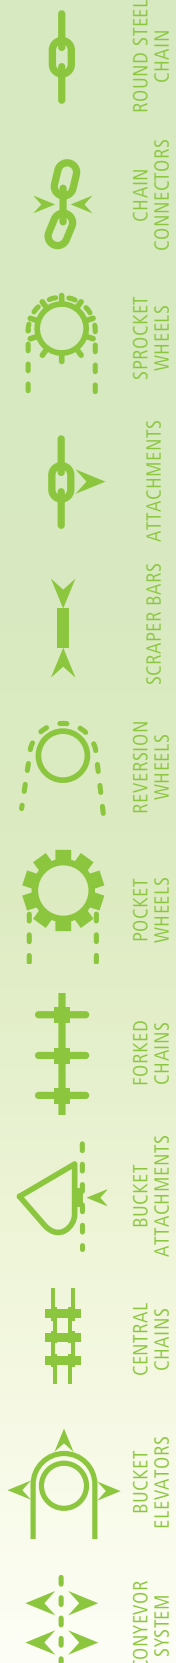

Our service range in the power station

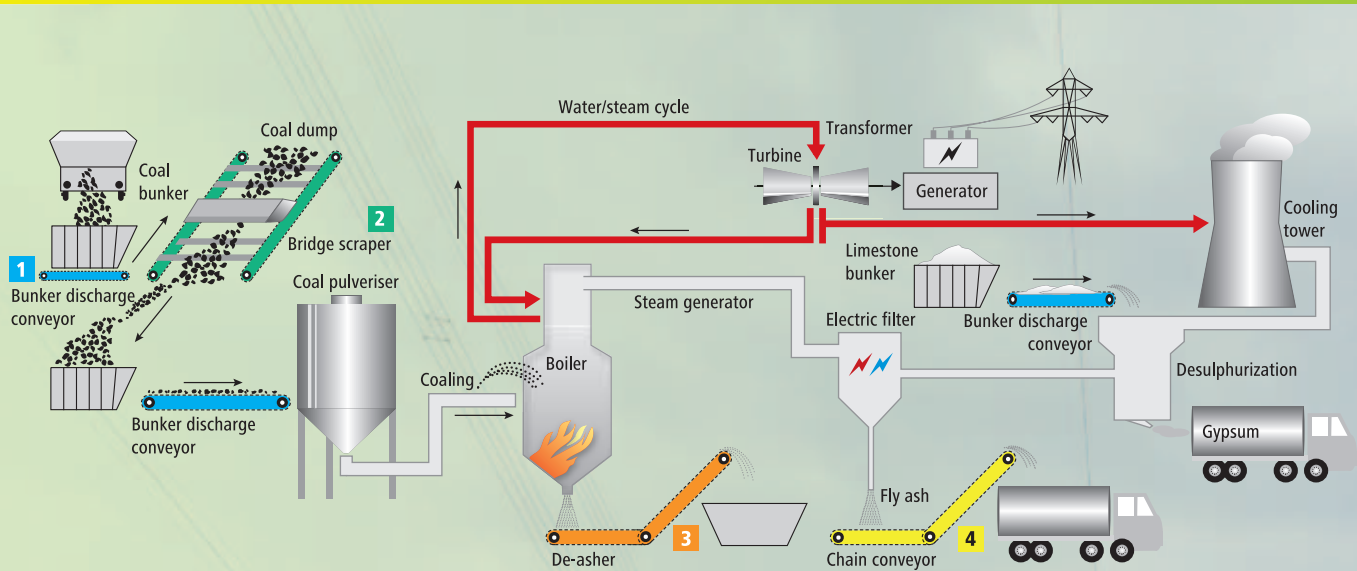

Fossil power stations will also become an important contribution towards global supply of energy.

For decades, RUD has been ensuring a high availability of coaling and ash remover plants with the help of its conveyor chains and hence ensures power generation in power stations.

Thanks to our extensive experience in ash removal of large power plant boilers, biomass combustion as well as waste incineration and recycling, all our system components are always perfectly coordinated and always work reliably.

- 1** Bunker discharge
- 2** Bridge scraper
- 3** De-asher
- 4** Chain conveyor
- 5** Components



Milestones



of RUD conveyor technology in the power station



1875: RUD as the foundation of ERLAU AG

1965: First round link steel chain in RUD 40 cG material

1985: First round link steel chain with RUD Super 35 quality

2006: DUOMOUNT

2008: First dry ash remover with RUD chains

2012: First biogas-substrate feeder

1951: First RUD global case-hardened round link steel chain

1957: First RUD chain for de-ashing

1992: First RUD apron conveyor

2007: RUD forked link chain FORKY

2010: RUD CRATOS

2015: Conveyor chain R160



Our references in the power station
Among others, we are system partners of:

MITSUBISHI HITACHI POWER SYSTEMS EUROPE

loibl Allen-Sherman-Hoff GmbH
a Diamond Power International, Inc. company

ALSTOM

CLYDE BERGEMANN

BiLFINGER



Milestones



for conveyor system for bulk materials



6

1875 Foundation of RUD Ketten Rieger & Dietz GmbH u. Co. KG

1945 Foundation of business area of conveyor systems by Werner Rieger

1961 Introduction of double-pitch case-hardened round link steel chains for high-capacity bucket elevators

1985 Round link steel chain with RUD Super 35 quality

1994 RUD central chain installed in high-capacity bucket elevators

1906 As the first company, RUD introduces electric welding of chain links

1965 Introduction of round link steel chain in 40cG material / market introduction of two-link bucket attachment system 65

1992 RUD apron conveyor

2001 Market introduction of RUD SWA side-wall attachment



Milestone of H+E conveyor system technology



1932 Foundation of engineering office for conveyor systems

1960 1st belt bucket elevator

1970 1st trough chain conveyor for 600 t/h

1973 1st screw conveyor for 300 t/h

1981 1st vertical screw conveyor

1988 Development of parallel weight tensioning station for bucket elevators, transport of 3000 t/h (band conveyor)

2001 1st central chain bucket elevator for 600 t/h

1933 Creation of 1st continuous flow conveyor for bulk materials

1940 Beginning of own production of 1st chain bucket elevator, 1st screw conveyor, 1st apron conveyor

1945 Foundation of machine factory Herfurth & Engelke

1969 1st chain bucket elevator for 300 t/h

1972 Transport of 1000 t/h (band conveyor)

1985 Development of high-capacity bucket elevator, 1st usage of steel cord belt in bucket elevators

1998 1st central chain bucket elevator, 1st chain bucket elevator for 1100 t/h



Together for over 200 years
of competence in bulk material conveyance



2004 Integration of H&E in RUD group

2006 Market introduction of RUD 2win two-link bucket attachment

2008 Central chain bucket elevator for 600 t/h

2011 1st TOOL MOVER

2007 RUD forked link chain FORKY

2009 First trough chain conveyor with RUD forked link chain FORKY

2011 1st tandem central chain bucket elevator for 1500 t/h

2011 Introduction of brand name BULKOS

2015 Conveyor chain R160



Whether it is a complete bucket conveyor, trough chain conveyor or spare parts for chain conveyors or maintenance and service, the RUD group is a reliable partner. Let it be transporting limestone from the mill to the bulk-tank or conveying salts from the mine to the surface, our **conveyor systems** are robust and are optimally designed for these conditions.

Thanks to our extensive experience in bulk conveyance of fertilisers, potassium & salt, cement and other special bulk materials, all our system components always work reliably.




Chain production

Milling

Heat treatment

Machine construction



Our conveyor chain systems at a glance



HORIZONTAL CONVEYOR

RUD System	Sprocket wheel system			System pocket wheel					
Chain	<p>Size 8 x 31 ... 38 x 144, material R80, R100, R140, R160</p>								
Connectors	<p>FL 22 x 86 ... 38 x 144</p>		<p>RSP 8 x 31 ... 19 x 7 5</p>		<p>VK 8 x 31 ... 34 x 136</p>				
Attachment type	Multiple link attachment		Single link attachment			Single link attachment			
Attachments	<p>DUMOUNT 26 x 100 ... 30 x 120</p>	<p>SSRF 14 x 50... 38 x 144</p>	<p>SSR 10 x 38 ... 30 x 120</p>	<p>F 18 x 64... 22 x 86</p>	<p>MEZZ 10 x 38 ... 38 x 144</p>	<p>FM 8 x 31 ... 30 x 120</p>	<p>MEET(K) 10 x 38 ... 38 x 144</p>	<p>F 18 x 64 ... 22 x 86</p>	<p>MEZT 10 x 38 ... 30 x 120</p>
Drive wheels	<p>Drive wheels (internal) interlocked, mostly multi-part at the drive after 14 x 50, rarely single, Locks always run vertically across the gears</p>								
Reversing wheels	<p>Type A with rim often at the tensioning station and as SOI, type B without rim for all the remaining deflections, rarely single gearwheels</p>			<p>Type C for attachment MEZZ and FL, alternative is single gearwheels</p>					
Applications									
Remark	<p>The sprocket wheel system is advantageous for conveyors that have an angled line profile (several times) (reversing wheels help this type of conveyors in association with the attachment) and have a sharp increase (>20°). Scraper height depending on the chain width, material to be transported and the gradient of the conveyor as well as the conveyance capacity must be calculated. Usual conveyance speed of 0.02 m/s to approximately 0.15 m/s depending on the service life to be projected. Typical example: De-ashing systems in power stations</p>			<p>Universally applicable as cleaning scraper conveyor, bunker discharge conveyor (multi-belt conveyor) as well as apron conveyor. Usual speed of 0.05 m/s to 0.2 m/s depending on the material to be transported. Straight line profile preferred, slightly inclined (up to 20°) installations possible. Scraper height normally not greater than $0H = 1,5 \times b_g$.</p>					



VERTICAL CONVEYOR

System 65		2win System		SWA System		Central chain System	
<p>Size 14 x 50 ... 34 x 126, material R80, R100, (R140)</p>						<p>Size RU80, RU150, RU200</p>	
<p>VK 14 x 50 ... 34 x 136</p>		<p>RSP 14 x 50 ... 19 x 75</p>		<p>FL 22 x 86 ... 34 x 136</p>		<p>Coupling strand; rarely necessary, if the tensioning distance is long enough</p>	
Multiple link mounting						Mounting angle	
<p>System 65 14 x 50 ... 34 x 136</p>		<p>2win 14 x 50 ... 34 x 136</p>		<p>SWA 16 x 64 ... 30 x 120</p>		<p>Is a separate component of the chain</p>	
<p>Driving wheel toothed with individual teeth</p>		<p>Driving wheel not toothed, hardened segments, toothed drive such as in system 65 even in difficult applications</p>		<p>Drive wheel toothed with individual teeth, rarely not toothed</p>		<p>Drive not toothed, hardened</p>	
<p>Reversing section always used with smooth sprocket, unhardened segments and flanged wheel</p>		<p>Reversing section always used with grooved sprocket, unhardened segments, special cases and with flanged wheel</p>		<p>Reversing section always used with grooved sprocket, unhardened segments and constriction wheel with hardened segments</p>		<p>Reversing section toothed (from 800 bucket width) / without teeth (up to 710 bucket width), hardened</p>	

ROUND STEEL CHAIN
CHAIN CONNECTORS
SPROCKET WHEELS
ATTACHMENTS
SCRAPER BARS
REVERSION WHEELS
POCKET WHEELS
FORKED CHAINS
BUCKET ATTACHMENTS
CENTRAL CHAINS
BUCKET ELEVATORS
CONVEYOR SYSTEM

Central chain bucket elevators for large conveyance capacities, coarse dry bulk materials (clinker, gravel, circulating goods and cement granules) and high speed (up to 1.7 m/s); steel chain bucket elevators.
System 65, for sticky, coarse-grained bulk materials, when using high-capacity bucket conveyors and speed 1.35 ... 1.5 m/s.
2win system for DIN bucket elevators (DIN bucket without gear teeth, HL and special bucket toothed), low granulation (up to 40 mm without gear teeth, toothed after that), speed of 1.0 ... 1.4 m/s;
SWA system for small conveyance capacities and low speed (... 0.8 m/s), highly abrasive materials to be transported that are difficult to empty (central discharge with technical consultation).

RUD chain technology

New special products –
What has improved in
our new chain grades?



1. 100% consistently inductively heated rods

This results in:

- Accurate link geometry
- Highly calibrated links
- Better engagement

Customer benefit:

- Optimised running geometry with components and wheels
- Better interlink contact to extend chain life



Customary conductive heating



2. 100% fully automatic welding controller with precise link

This results in:

- Optimal process control

Customer benefit:

- Longer life
- Increased breaking force
- Safer operation





RUD is benchmark company in providing quality products with advantages in wear resistance and performance ahead of all competing companies



3. 100% fully automatic control and regulation of calibration

This results in:

- Highly calibrated chain strands
- More accurate chain properties for multi-strand applications

Customer benefit:

- Optimised run-in behaviour
- Lower wear
- Lower maintenance costs



4. A world first! RUD conveyor chain R160 made of specially smelted special steel

This results in:

- New options in heat treatment

Customer benefit:

- Improved wear characteristics in case of equal breaking force



RUD chain technology

Our strengths at a glance




12

Manufacturer		RUD®				
Argument	Founding	R80	R100	R140	R160	
Wear	Carburising depths in the link after macro etching (HTÄ)	0.10	0.10	0.14	≥ 0.16	
	Surface hardness in the link (HV)	800	820	≥ 820	≥ 820	
	System components (compatible with each other)	+++	+++	+++	+++	
Operational safety	100 % calibrated/ reproducibility	+++	+++	+++	+++	
	Special fused metal for chain steel with special alloy proportions	+	++	++	+++	
	Crack retention capacity	+	+++	+++	+++	
Simple assembly / traceability	Matching	+++	+++	+++	+++	
	Labelling on every component and chain link	+++	+++	+++	+++	
	Labelling of suitable pair using colours	+++	+++	+++	+++	
Downsizing	Tensile stress up to N/mm ²	340	450	400	400	

Round link steel chains

The new RUD specification

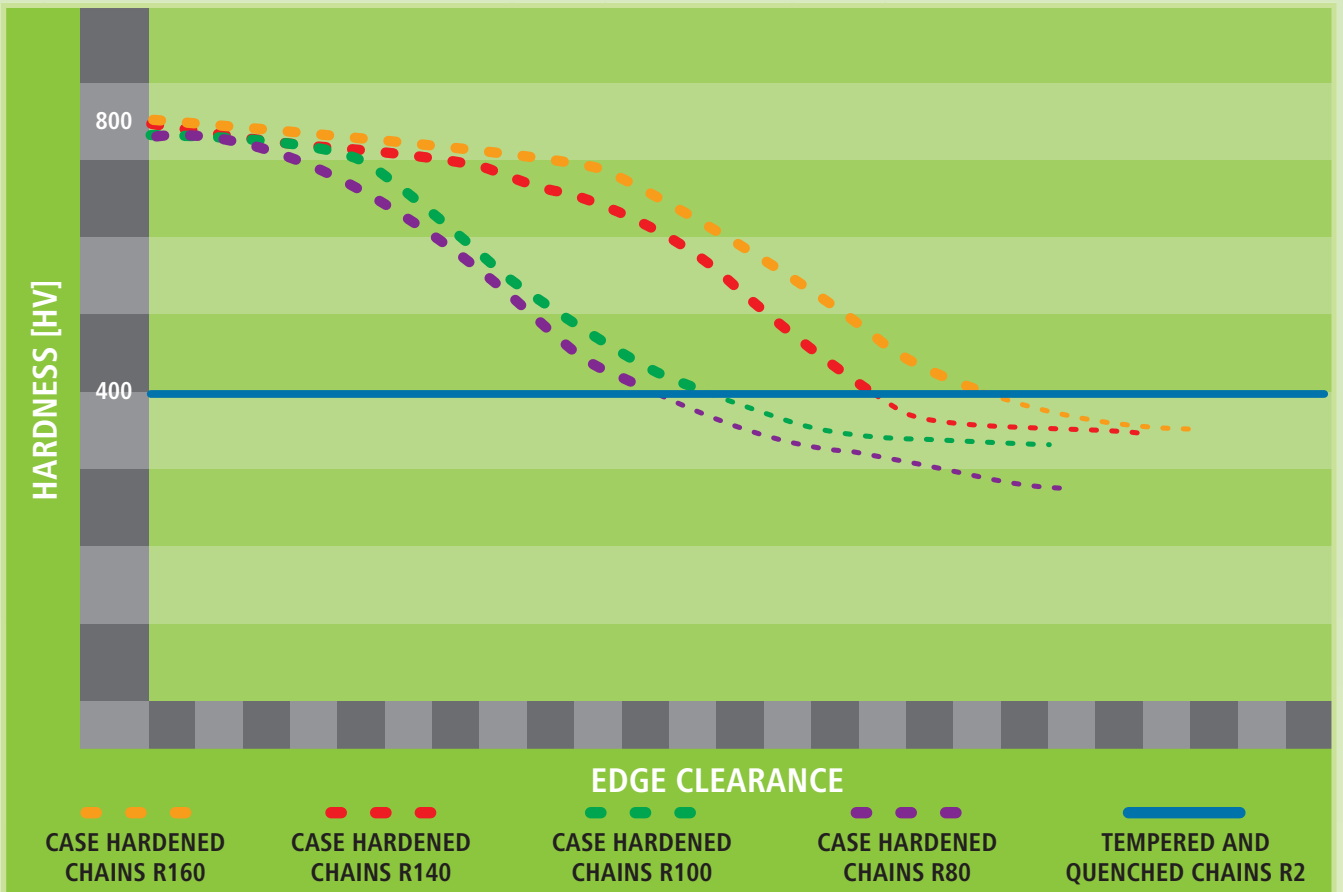

CASE HARDENED CHAINS R160

CASE HARDENED CHAINS R140

CASE HARDENED CHAINS R100

CASE HARDENED CHAINS R80

TEMPERED AND QUENCHED CHAINS R2

EDGE CLEARANCE



CROSS-SECTION R140


CROSS-SECTION R80

HARDNESS PROFILE ACROSS THE CROSS-SECTION

ROUND STEEL CHAIN
CHAIN CONNECTORS
SPROCKET WHEELS
ATTACHMENTS
SCRAPER BARS
REVERSION WHEELS
POCKET WHEELS
FORKED CHAINS
BUCKET ATTACHMENTS
CENTRAL CHAINS
BUCKET ELEVATORS
CONVEYOR SYSTEM

Round steel chain

The new RUD Specification

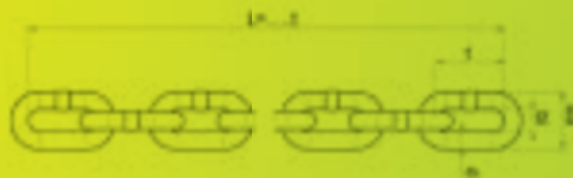

14

Round steel link chains in special grades – highly wear-resistant					
Chain d x t in mm	Chain width		Weight kg/m	Strand length [m / link] *1)	Attachmend distance [links]
	bi (min.) mm	ba (max.) mm			
8 x 31	10.3	28	1.3	50.0 / 1613	variable
				Fitting strand	
				24.893 / 803	
10 x 38	12.5	34	2.1	50.0/1315	variable
				Fitting strand	
				20.026/527	
14 x 50	16.3	47	4.0	Fitting strand	variable
				Fitting strand	
				Fitting strand	
14 x 64	16.3	47	3.7	10.176/159	
				Fitting strand	
16 x 64	20	55	5.1	19,9/311	variable
				Fitting strand	
18 x 64	21	60	6.9	15.296/239	variable
				Fitting strand	
19 x 75	22	63	7.7	10.725/143	variable
				Fitting strand	
19 x 120	23	65	6.3	3.0/25	2
				5.16/43	
				Fitting strand	
22 x 86 *5)	26	74 (73)	9.7 (9.5)	10.234/119	variable
				Fitting strand	
25 x 95	34	90	12.5	8.265/87	4
				Fitting strand	
26 x 92	30	85	13.7	14.444/157	variable
				Fitting strand	
26 x 100	31	87	13.3	7.9/79	4/8/10/16
				8.3/83	4/6/12/14
				Fitting strand	–
30 x 108	34	97	18.0	10.692/99	variable
				Fitting strand	
30 x 120	36	102	17.5	5.640/47	4/6/8/12/16
				5.88/49	10
				Fitting strand	–
34 x 126	38	109	22.7	8.694/69	variable
				Fitting strand	
34 x 136	39	113	23.8	4.760/35	4/6/12/18
				5.304/39	4/8/10
				Fitting strand	–
38 x 144	44	127	30.0	3.312/23	8/12
				4.176/29	4/6/10
				Fitting strand	-


Properties:

- highly wear-resistant for a long time
- high-strength, as optimally heat-treated
- self-cleaning
- low-maintenance when compared to other systems
- simple assembly and disassembly of RUD components in the chain belt

Ordering example:

Chain for bulk material: **R100**
 Dimension: **19 x 75**
 Number in strands: **10**
 Looped chain length: **20 m**
 Type of conveyor: **Double strand**

Round steel link chains in special grades – highly wear-resistant *3)


	R2		R2B		R80		R100		R140		R160		Chain d x t in mm
	Breaking force [kN]	RUD part number	Breaking force [kN]	RUD part number	Breaking force [kN]	RUD part number	Breaking force [kN]	RUD part number	Breaking force [kN]	RUD part number	Breaking force [kN]	RUD part number	
80	51697 7983021						50	7905630 7905631					8 x 31
125	7987062 7983022						75	7905633 7905634					10 x 38
250	8504309 ^{*)}						140	7905636 7905638					14 x 50
							128 ^{*)}	7900548 7982305					14 x 64
			240	7988920 7989510			180	7905640 7905641					16 x 64
							225	7905643 7905644					18 x 64
			340	7904795 7904540			260	7905646 7905648	230	7905862 7905863			19 x 75
							260	7905650 7905651 7905652					19 x 120
610	8504310 ^{*)}	450	7101775 7101774		260	7905474 7905475	350	7905654 7905655			310	7905719 7905720	22 x 86 ^{*)}
							400	7905657 7905658					25 x 95
850	8504311 ^{*)}				370	7905480 7905477							26 x 92
					370	7905491 7905492 7905493	425	7905660 7905661 7905662			430	7905722 7905723 7905724	26 x 100
1130	8504312 ^{*)}				440	7905497 7905496							30 x 108
					440	7905498 7905499 7905500	640	7905664 7905666 7905667			580	7905727 7905728 7905729	30 x 120
1450	8504313 ^{*)}				460	7905502 7905503	720	7905670 7905672					34 x 126
					460	7905521 7905522 7905506	720	7905675 7905676 7905678	630	7905865 7905866 7905868			34 x 136
							920	7905680 7905681 7905683					38 x 144

^{*)} maximal variable length: no longer than the standard belt length (in bold print)
^{*)} length in compliance with ordering specifications

^{*)} Allowed tolerance of breaking tension +/- 10%

^{*)} RUD materials R40c-G/S3
^{*)} bracketed values for chain material R2

Chain connectors RSP

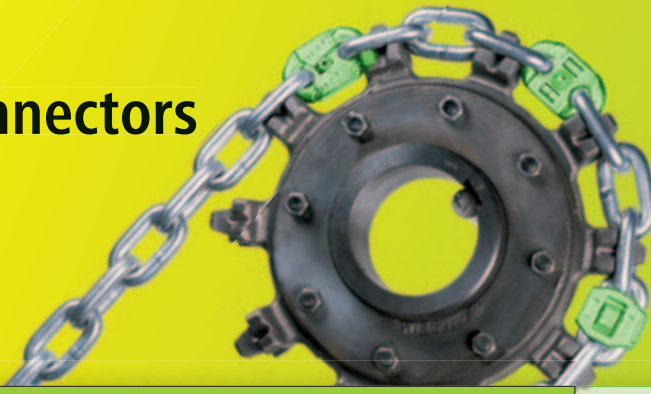



Chain connector RSP (space-saving)

RUD part no.	Chain d x t in mm	A	B	C	E	kg / Piece
58571*	8 x 31	22	29	10	M 5	0.05
54959 *	10 x 38	27	35	12	M 6	0.1
53900	14 x 50	38	48	17	M 8	0.25
53977	14 x 64	38	48	17	M 8	0.3
57947	16 x 64	43	56	18.5	M 10	0.5
52694	18 x 64	43	56	18.5	M 10	0.5
55196	19 x 75	51	66.5	23	M 12	0.8

Properties:

- For using in single and multi-strand conveyors
- For medium operating conditions
- Highly wear-resistant
- Installation dimension corresponding to chain link dimension
- Run over sprocket wheels, grooved wheels and flat wheels - vertical
- Run over pocket wheels vertical;
In special cases horizontal run possible - see picture underneath

* zinc-coated

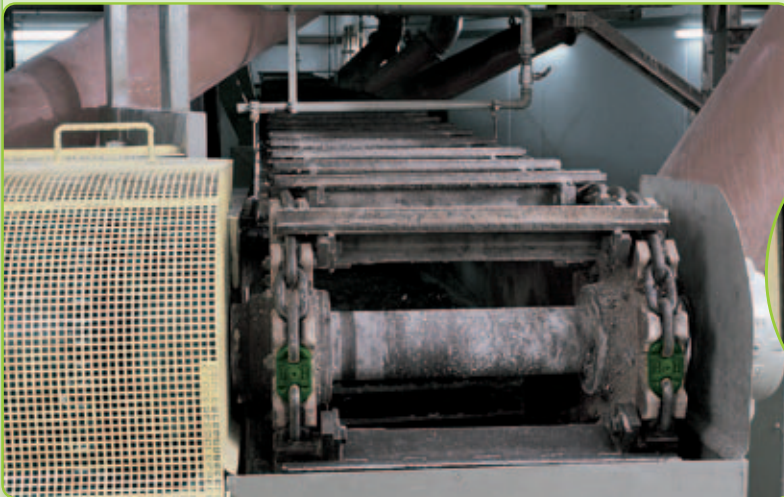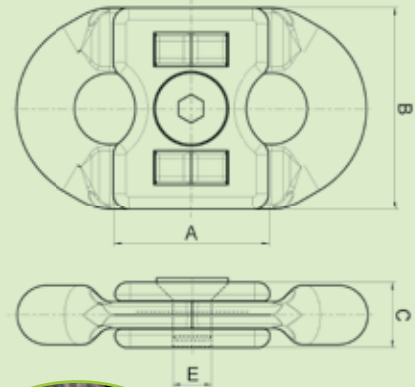


Connecting link for chain grade R2

RUD part no.	Breaking force [kN]	For Chain d x t in mm	A	B	C	D	[kg/Piece]
7986777	80	8 x 31	62	32	22	12	0.08
58594	125	10 x 38	77	36	28	13	0.14
7987640/ 8500097	246	14 x 50	96	46	32	17	0.8/0.9

Connecting links for chain grade R2

- Runs preferably vertical over pocket wheels

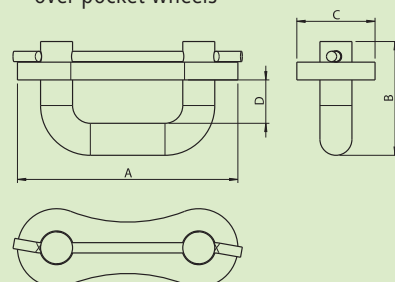

Chain connector

FL · VK



Flat connector for FL


RUD part no.	Chain d x t in mm	A	B	C	kg / Piece
55578	22 x 86	58	77	26	1.2
62113	26 x 100	62	89	29	1.8
53280	30 x 120	70	107	36	2.9
55357	34 x 136	82	117	40	4.3
7990647	38 x 144	95	133	45	5.8

Properties:

- For using in single and multi-strand conveyors
- Simple hammer assembly
- Highly wear-resistant
- Installation dimension corresponding to approximate chain link dimension
- For medium to difficult operating conditions
- Run over sprocket wheels and pocket wheels, grooved wheels and flat wheels



Assembly of chain connector FL

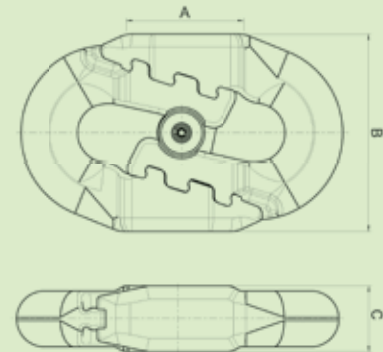

Chain connector VK


RUD part no.	Chain d x t in mm	A	B	C	F	kg / Piece
54922*	8 x 31	27	29	31	M 8	0.1
54941*	10 x 38	32	36	36	M 10	0.3
54970	14 x 50	39	47	49	M 12	0.6
61326	16 x 64	51	57	57	M 16	1.1
55021	19 x 75	61	70	67	M 20	2
50039	19 x 120	61	70	67	M 20	2.3
55035**	22 x 86	70	79	77	M 20	2.8
51487**	26 x 100	80	90	88.5	M 24	4.6
60551**	30 x 120	100	105	105	M 30	8.1
7991616**	34 x 136	110	120	120	M 33	11.8

Properties:

- For using in single and multi-strand conveyors, extremely robust and high wear volume
- Run only over sprocket wheels and flat wheels
- For difficult operating conditions

* zinc-coated

** Fixing screw is overlapping on both sides

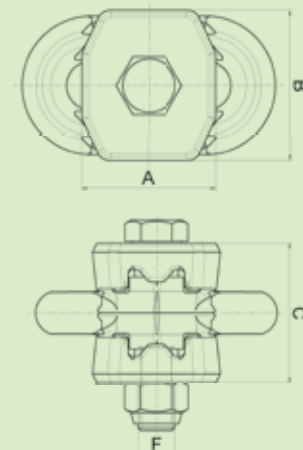

Sprocket wheel multi-part



Sprocket wheel multi-part *								
Chain d x t in mm	No. of teeth	PCD Ø	A	B	Standard Dimension C	E _{max.}	F _{max.} = Hole-Ø in mm	Complete wheel approximately kg/piece
10 x 38	8	194	31	95	27.0	80	60	6.3
	12	291	31	140	27.0	80	80	15.5
	16	388	31	130	30.0	85	80	25.5
14 x 50	6	193	42	95	9.0	70	75	7.5
	8	256	42	120	25.0	75	85	11.6
	9	288	42	140	45.0	90	100	13.1
	10	319	42	160	45.0	90	100	20.6
	12	383	42	155	50.0	100	100	33.0
	13	415	42	155	50.0	100	100	38.0
14 x 64	7	287	42	140	45.0	90	100	16.0
	8	328	42	160	45.0	90	100	21.5
16 x 64	8	328	50	160	31.5	75	100	23.5
	9	368	50	185	30.5	125	125	41.5
	10	409	50	200	45.0	120	135	49.5
19 x 75	8	384	55	185	40.0	135	125	41.5
	10	479	55	220	45.0	120	140	71.5
22 x 86	8	440	55	185	40.0	120	120	76.5
	9	495	65	230	80.0	160	140	88.5
	10	549	65	270	80.0	160	170	95.5
26 x 100	8	512	78	270	100.0	200	180	110.0
	9	575	78	300	45.0	170	220	141.0
	10	639	78	340	80.0	160	210	155.0

Properties:

- with replaceable, highly wear-resistant tooth discs
- for difficult operating conditions

Ordering example

for the complete wheel:

Sprocket wheel: **multi-part**

For chain: **30 x 120**

Number of teeth: **8**

Hole-Ø: ...mm

Dimension C: ...mm

Dimension E: ...mm

Number in pieces: **10**

Ordering example

for tooth discs:

Tooth discs: **multi-part**

For chain: **19 x 75**

Number of teeth: **8**



Number in pieces: **10**

For spare parts, refer to page 20.

* with tooth disc



Sprocket wheel multi-part*

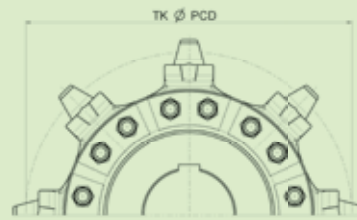

Sprocket wheel multi-part**




Sprocket wheel multi-part **								
Chain d x t in mm	No. of teeth	PCD Ø	A	B	Standard Dimension C	E _{max.}	F _{max.} = Hole-Ø in mm	Complete wheel approximately kg/piece
30 x 120**	8	614	98	320	90.0	180	220	140.0
	9	690	98	320	90.0	180	230	170.0
	10	766	98	320	60.0	190	200	216.0
34 x 136**	8	697	107	320	110.0	220	220	195.0
	9	783	107	380	110.0	220	240	262.0
38 x 144**	8	738	108	365	110.0	220	220	270.0

** with replaceable, highly wear-resistant individual teeth

Sprocket wheel

single-part



Sprocket wheel single-part

Chain d x t in mm	No. of teeth	PCD Ø	A	B	Standard Dimension C	E _{max.}	F _{max.} = Hole-Ø in mm	Complete wheel approximately kg/piece
8 x 31	5	100	25	52	25.0	60	40	1.0
	7	139	25	92	27.5	55	65	2.6
	8	159	25	80	30.0	60	50	3.0
	10	198	25	95	17.0	47	65	3.6
	14	277	25	110	27.0	80	70	7.5
	16	316	25	120	27.0	80	80	9.2
10 x 38	22	434	25	120	45.0	90	80	16.1
	6	147	31	89	30.0	60	60	4.0
	7	170	31	114	25.0	75	85	3.3
	8	194	31	95	27.0	80	60	6.3
	10	243	31	90	20.0	60	50	6.5
	12	291	31	140	27.0	80	80	15.5
14 x 50	16	388	31	130	30.0	85	80	28.5
	6	193	42	92	40.0	80	75	7.5
	8	256	42	120	30.0	90	100	13.7
	10	319	42	160	45.0	90	110	20.0
16 x 64	16	510	42	160	60.0	120	120.0	31.5
	6	246	50	160	25.0	68	115	8.5
	8	327	50	145	45.0	90	100	18.0
	9	368	50	160	30.0	125	115	26.5
18 x 64	10	409	50	175	45.0	120	125	34.5
	6	247	55	150	28.0	75	100	9.5
19 x 75	8	384	55	180	40.0	135	110	40.5
	9	575	78	220	45.0	120	120	85.0
22 x 86	6	331	65	190	35.0	200	140.0	64.0

Properties:

- highly wear-resistant for difficult operating conditions
- unhardened for easy operating conditions

Ordering example:

Sprocket wheel: **single-part**

For chain: **19 x 75**

Numer of teeth: **8**


Hole-Ø: **...mm**

Dimension C: **...mm**

Dimension E: **...mm**

Number in piece **10**



- Other dimensions on request

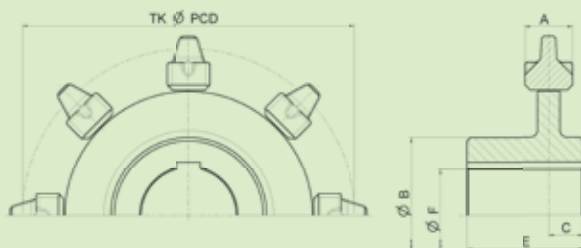

Sprocket wheel single-part

Our tip

Toothed segments with increased pitch circle diameter

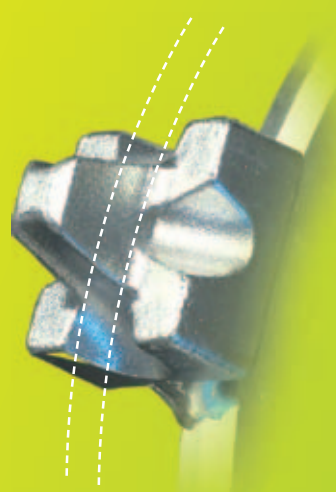

Tooth discs and individual teeth, optimally adapted to the proportional chain extension given at the time of replacement.

Available in dimensions 10 x 38 to 38 x 144 for all multi-part sprocket wheels.

Prices on request!

Ordering example:

System: _____

Chain: _____

Teeth no.: _____

Wheel no.: _____


Part no. sprocket wheel: _____

Drawing no. sprocket wheel: _____

Current chain length

in %: _____

Planned installation date: _____

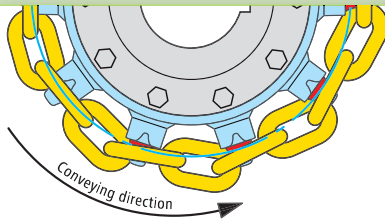


Previous chain runs aground!

Indications of too heavily work chain:

- uneven run,
- hook formation at rear tooth flank,
- flank clearance used up,
- strong vibration at the drive,
- chain falls only after several teeth on chain link support of the teeth

— · — P.C.D. of standard sprocket wheel

— · — The chain suited enlarged p.c.d. of the teeth

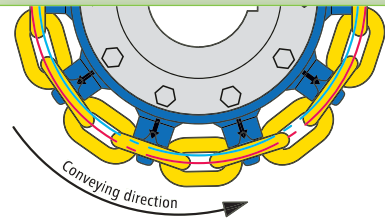

Later – the chain wear is compensated for by using a new tooth segment with larger tooth flank.

- The solution: sprocket wheels with increased pitch circle diameter.
- Replaceable tooth segments / individual teeth increase the life cycle of the complete sprocket wheel

Run-in behaviour of worn chain at the driving gear


- A. Distance of horizontal chain link – horizontal link support at the tooth (approx. 30 –35 mm)
- B. Synchronisation of vertical link at the outermost tip of the tooth



In case of new chains, new tooth discs / individual chains should always be used.

Structure of sprocket wheel - multi-part

1. Hub disc
2. Tooth wheel segment
3. Counter disc

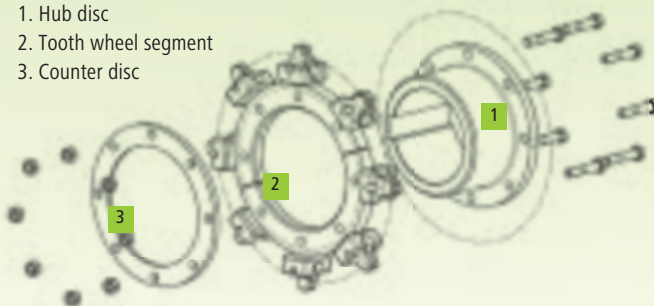


In case of new chain components, the horizontal link is on the horizontal link support of the tooth when running-in on the first tooth of the sprocket wheel. Chain elongation due to wear results in

the chain mounting in the direction of the tooth tip. In this case, the vertical link is only taken from the tooth tip and there exists the danger of skipping the chain.

Attachments

System sprocket wheel

FM




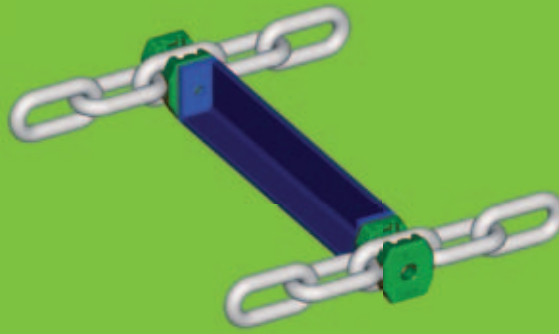


Attachment F										
RUD Part no.	Chain d x t in mm	A	B	C	E	F	G	H	I	kg/Pcs
52738	8 x 31*	27	29	15.5	2.5	10.5	M 8	40	5	0.1
52740								45	10	0.1
52742								50	15	0.1
52743	10 x 38*	32	36	18	3	12.5	M 10	50	8	0.15
52744	14 x 50	39	47	24.5	3	15.5	M 12	65	10	0.4
52745								70	15	0.4
52746								75	20	0.4
52747	16 x 64	51	57	28.5	4	20	M 16	80	15	0.8
52748								90	25	0.8
52749								110	45	0.8
52751	19 x 75	61	70	33.5	5	22.5	M 20	110	30	1.4
52752								120	40	1.4
52755								130	50	1.4
52756	22 x 86	70	79	38.5	5	26	M 20	110	20	1.9
52757								120	30	1.9
52758								130	40	1.9
52759	26 x 100	80	93	43	6	30	M 24	130	30	3.0
7989190								160	60	
52760	30 x 120	100	105	52.5	7	37	M 30	160	40	5.2

Properties:

- screwed and can be clamped / screwed in the tensioned chain strand
- for scraper height up to 1.8 times the outer chain link width
- variable scraper distance possible
- for rough operating conditions
- run over sprocket wheels and plain wheels

H = screw length I = clamp length
* with head screw

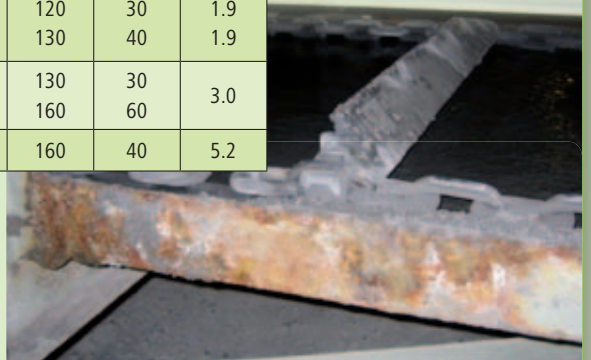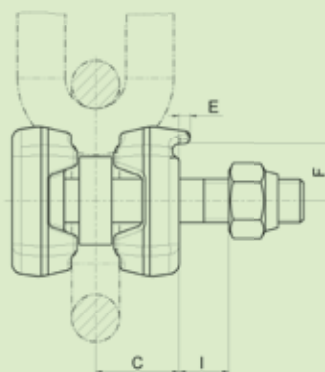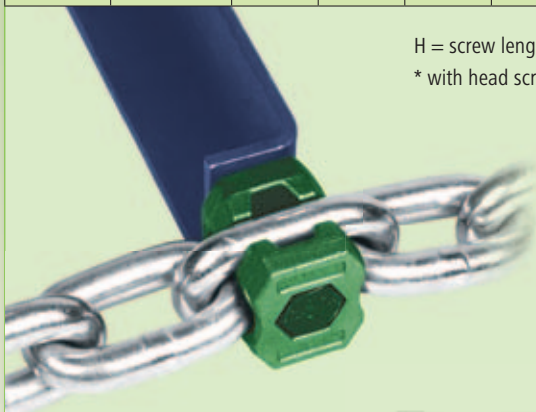

Attachments

System sprocket wheel


MEZ-Z · F



Attachment MEZ-Z								
RUD Part no.	Chain d x t in mm	A	B	C	E	F	G	kg/pair
61629	10 x 38	35	100	12	37	11	30	0.3
61630	14 x 50	50	130	30	52	13.5	36	1.25
61635	22 x 86	75	190	36	75	22	50	3.2

Properties:

- for medium to difficult operating conditions
- for scraper height up to 1.5 times the outer chain link width
- assembly and disassembly in case of tensioned chain possible
- Run across sprocket wheels and flat wheels

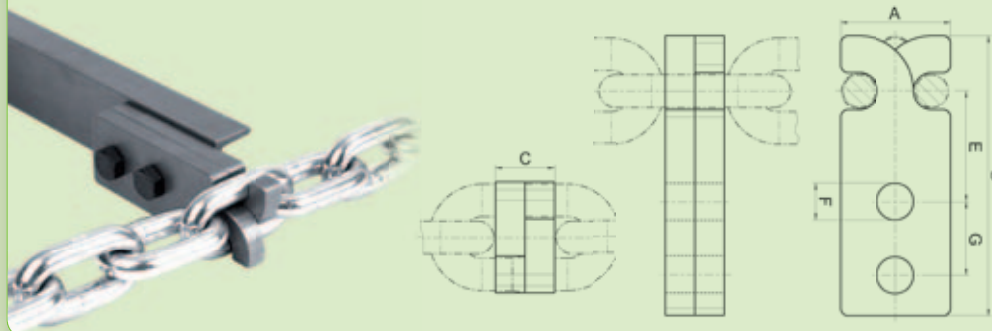


Attachment F									
RUD Part no.	Chain d x t in mm	A	B	C	E	F	G	Kmax	kg / pair
53215	18 x 64	126	35	30	65	17	40	45	0.64
55039	19 x 75	134	46	20	75	18	40	37	0.71
53065	22 x 86	139	46	20	80	18	40	51	0.71

Properties:

- for medium and difficult operating conditions
- directly welded
- for scraper height up to 1.5 times the outer chain link width
- assembly and disassembly of scraper bars in case of tensioned chain loops
- replacement for chain ends and chain brackets
- run across sprocket wheels, pocket wheels and grooved wheels

Attachment F can also be used in pocket wheel system.

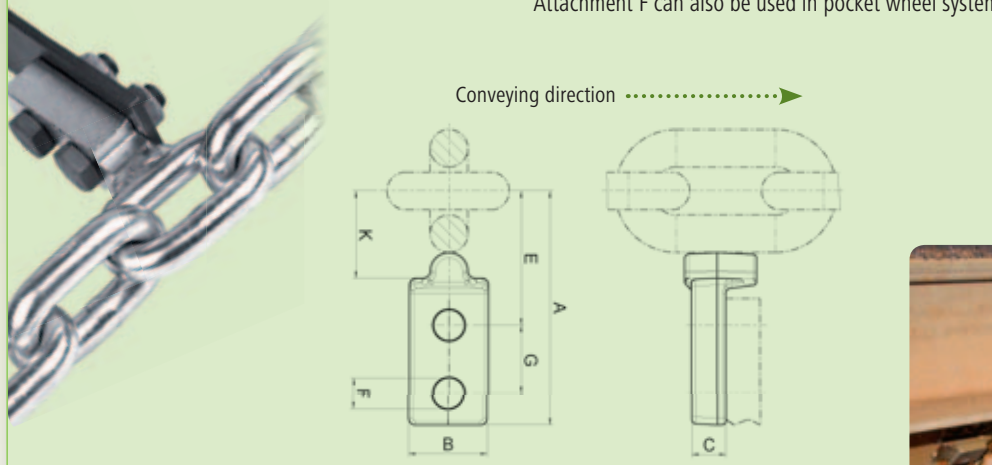

Attachments

System sprocket wheel

SSR




Attachment self-locking - reversible SSR

RUD Part no.	Chain d x t in mm	A	B	C	E	H	G	I	K	kg/Pcs
55333	10 x 38	82	24	10	30	58	M 10	12	10	0.3
60812	19 x 75	175	60	20	58	65	M 20	62.5	20	2.5
60343	22 x 86	200	70	20	68	71	M 20	72.5	20	3.4
59991	26 x 100	235	80	20	72	85	M 20	85	20	4.8
62331	30 x 120	280	90	25	85	98	M 24	100	24	7.5

Properties:

- for difficult operating conditions
- for double-strand conveyors
- reverse operation possible
- robust and easy
- run across sprocket wheels and grooved wheels

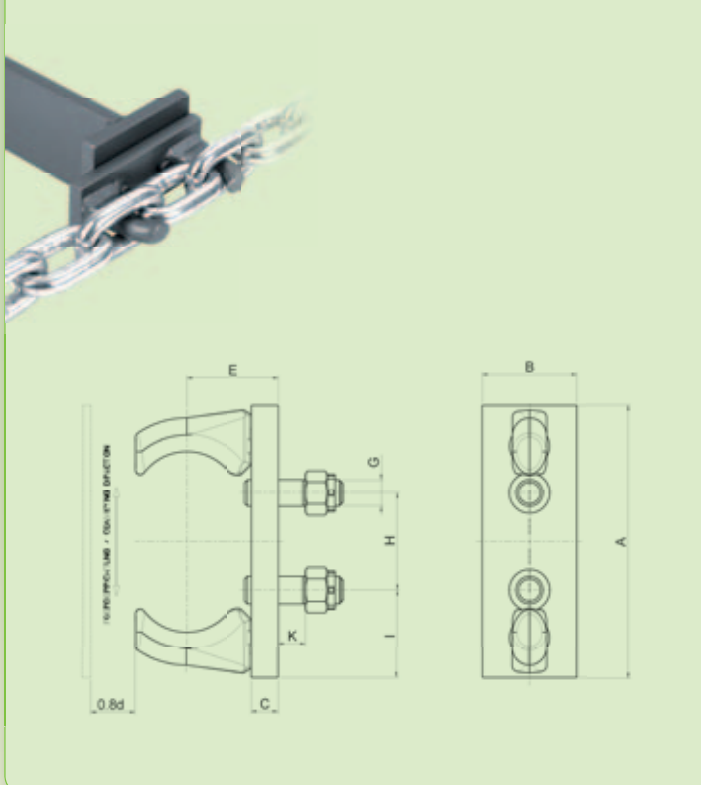

Attachment

System sprocket wheel

SSRF





Attachment self-locking - reversible flat SSRF

RUD Part no.	Chain d x t in mm	A	B	C	E	F	kg / Pcs
7903811	14 x 50	113	19	50	73	25	0.5
7903812	16 x 64	138	22	59	83	30	0.8
7903813	19 x 75	160	25	69	100	36	1.2
7903573	22 x 86	185	28	80	116	37	2
7903814	26 x 100	218	34	92	135	45	3.3
7903815	30 x 120	258	40	110	160	56	5.3
7903816	34 x 136	288	44	122	177	60	7.2
7903817	38 x 144	312	46	137	199	68	10

Properties:

- for very high conveyance capacities
- multiple link attachment
- for scraper height up to 2.5 times the outer chain link width
- weldable at scraper profiles of any shapes
- variable scraper distance possible
- highly wear-resistant
- run over sprocket wheels and grooved wheels

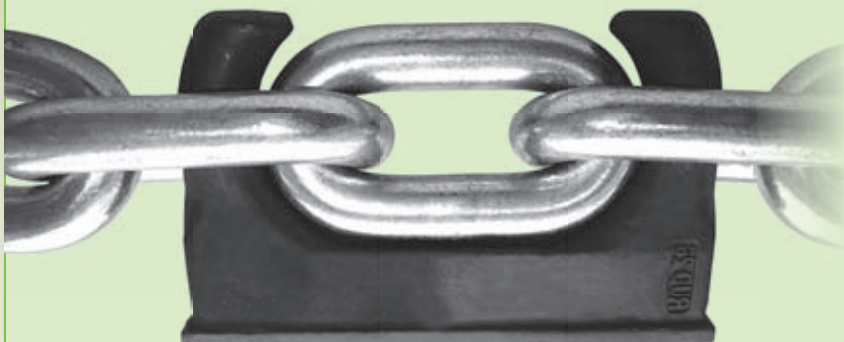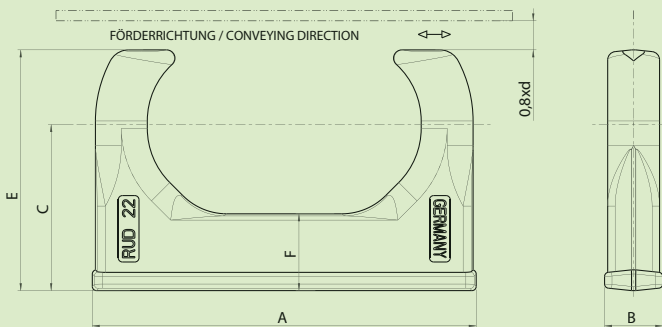

Attachment

System sprocket wheel


DJOMOUNT®



DJOMOUNT® Attachment

RUD Part no.	Chain d x t in mm	A	B	C	E	F	G	H	I	kg / Pcs
7995852*	26 x 100	214	30	112	155	65	120	25	20.5	5.2
7996192*	30 x 120	252	35	129	179	75	142	27	24.5	8


* Distribution without screw

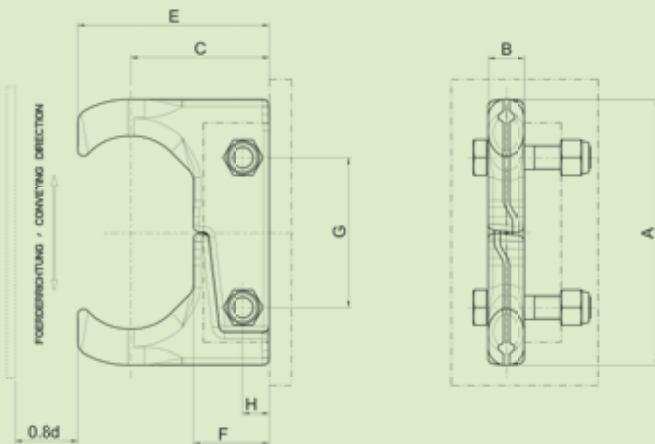

Properties:

- for very high conveyance capacities up to 50 t/h
- multiple link attachment
- for scraper height up to 2.5 times the outer chain link width
- can be tensioned in the tensioned chain belt
- scraper profiles of any shapes possible
- variable scraper distance possible
- highly wear-resistant
- runs over sprocket wheels and grooved wheels

Simplest assembly – in the tensioned chain strand!

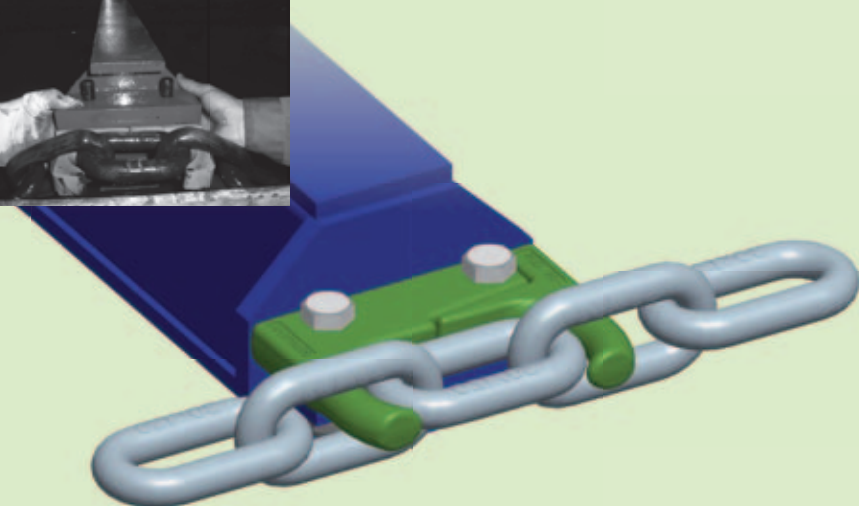

ROUND STEEL CHAIN
 CHAIN CONNECTORS
 SPROCKET WHEELS
 ATTACHMENTS
 SCRAPER BARS
 REVERSION WHEELS
 POCKET WHEELS
 FORKED CHAINS
 BUCKET ATTACHMENTS
 CENTRAL CHAINS
 BUCKET ELEVATORS
 CONVEYOR SYSTEM

Scraper bars

Safer scraper operation
with matched RUD strands




Our scraper bars and attachments form the perfect system in association with our paired chain strands:

- simplest assembly and disassembly
- optimal run across the pocket and sprocket wheels
- the suitable scraper design for every material to be transported
- lower wear
- no scraper tilting
- everything from a single source
Chains, connectors, scraper bars and wheels

RUD product advantage: Labelling of suitable pair using colours!



Unpaired scraper conveyor

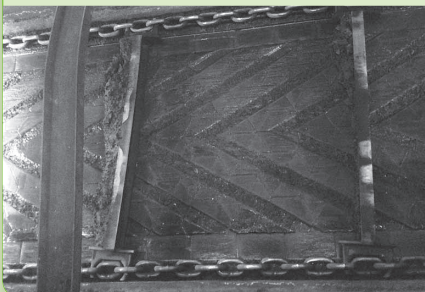

Paired RUD double-strand conveyor





Strand lengths, production tolerance:

+ 0.4 % = 0,55 % max.
- 0.15 %
i.e. for 10 m length, max. difference 55 mm

Length tolerance ΔX of matched chain left

(multiple-belt-conveyor)
 $\Delta X = 0.05 \% \text{ max.}$, i.e. for e.g. 10 m long belts the max. difference is. 5.0 mm.
If the length of the belt is < 8 m, the largest pair tolerance = 4 mm.

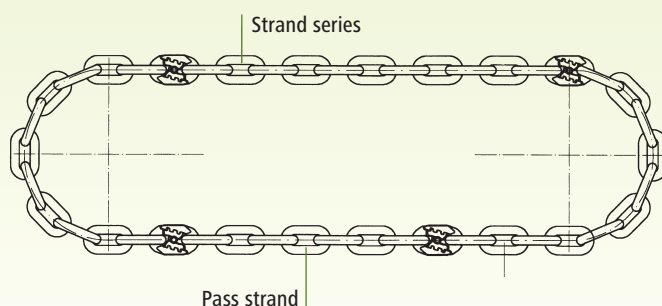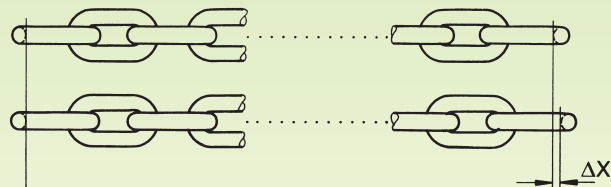

- When ordering looped chain in millimetres, we require the precise scraper distance for distributing into individual belt lengths.

Scraper bars

The correct scraper bar for your requirements.




RUD scraper bars are always optimally adapted to the requirements and operating conditions specified to us by the customer. We produce scraper bars as per the specifications of the customers, provided that no consultation or support is necessary. Alternatively, we suggest an optimal scraper version based on an intensive consultation, which is developed in the dialogue

The following information is hence necessary and evaluated by us:

- clear trough width of the conveyor as well as its exact line profile
- trough bottom material and design
- chain centre distance
- maximum occurring / requested conveyance capacity
- conveyance speed
- properties of the material to be conveyed such as dampness, bulk density, angle of friction, particle size

Usage examples* – scraper bars and attachments


Standard U profile with MEE-T attachment



Typical usage options:

- cleaning scraper conveyor


Standard scraper bar design for difficult conditions with SSRF or Duomount

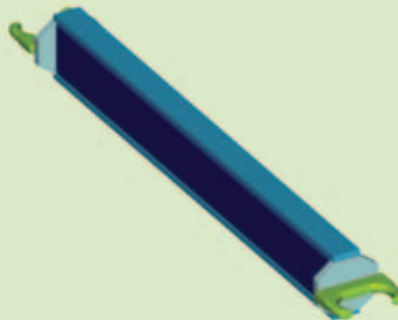

Typical usage options:

- wet de-ashing systems

Standard angle profile with MEE-T attachment

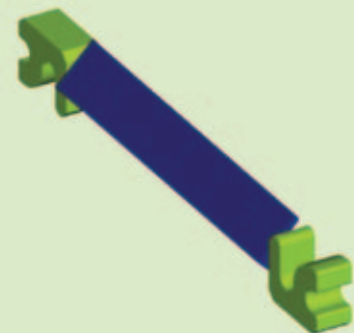

Typical usage options:

- coaling systems / coal feeders
- Bunker discharge conveyor

* Other scraper bar designs on request

Scraper bars

Usage areas for RUD scraper bars



**Bridge scraper bars
with system 65**



**Grain conveyor
with SSRF attachment**





**Landfill waste –
bunker discharge
with MEE-T attachment**







De-asher with SSRF attachment

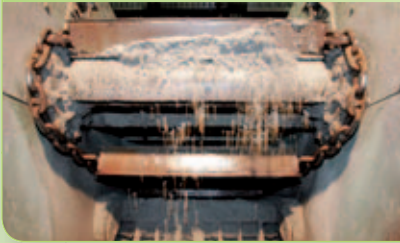


De-asher with FM attachment




De-asher with F attachment

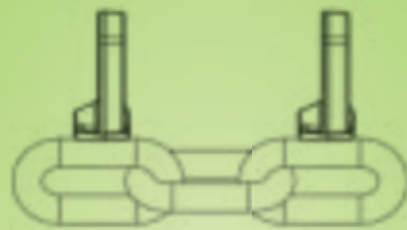


Reversion wheels



Type A



Type B



Type C

Reversion wheel type A				
Chain d x t in mm	corr. teeth number	PCD Ø	C*	E* (type A or C)
10 x 38	8	194	15.5	45
	10	243	15.5	45
	12	291	15.5	45
14 x 50	8	256	21	60
	10	319	21	60
	12	383	21	60
16 x 64	8	327	25	70
	10	409	25	70
	12	490	25	70
18 x 64	8	323	27.5	80
	10	402	27.5	80
19 x 75	8	384	27.5	80
	10	479	27.5	80
	12	574	27.5	80
22 x 86	8	440	32.5	90
	10	549	32.5	90
	12	658	32.5	90

Other sizes on request.



Properties:

- grooved wheels with rim
- for using at tensioning stations

Reversion wheel type B				
Chain d x t in mm	corr. teeth number	PCD Ø	C*	E = 2C* (only type B)
10 x 38	8	194	15.5	31
	10	243	15.5	31
	12	291	15.5	31
14 x 50	8	256	21	42
	10	319	21	42
	12	383	21	42
16 x 64	8	327	25	50
	10	409	25	50
	12	490	25	50
18 x 64	8	323	27.5	55
	10	402	27.5	55
19 x 75	8	384	27.5	55
	10	479	27.5	55
	12	574	27.5	55
22 x 86	8	440	32.5	65
	10	549	32.5	65
	12	658	32.5	65

Other sizes on request.



Properties:

- grooved wheels without rim
- for using in loose side of the belt under the trough

Reversion wheel type C				
Chain d x t in mm	corr. teeth number	PCD Ø	C*	E* (type A or C)
10 x 38	8	194	15.5	45
	10	243	15.5	45
	12	291	15.5	45
14 x 50	8	256	21	60
	10	319	21	60
	12	383	21	60
16 x 64	8	327	25	70
	10	409	25	70
	12	490	25	70
18 x 64	8	323	27.5	80
	10	402	27.5	80
	12	482	27.5	80
19 x 75	8	384	27.5	80
	10	479	27.5	80
	12	574	27.5	80
22 x 86	8	440	32.5	90
	10	549	32.5	90
	12	658	32.5	90

Other sizes on request.




Properties:

- plain wheels with rim
- for both the use cases, however only possible when using flange attachments and very short scraper distances

* For dimension C and E, refer to page 64.
For ordering, please use the questionnaire on page 64.

Submerged Overhung Idler (SOI)

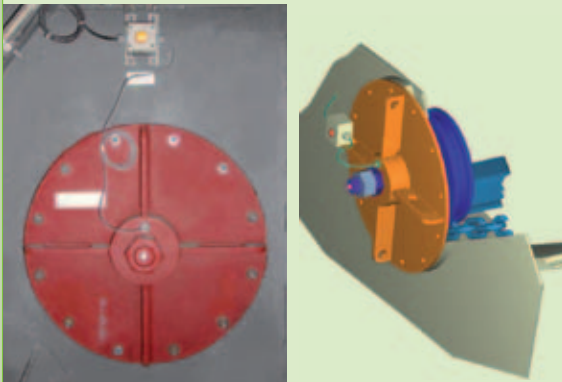


- Grooved wheels with rim for using in the hoistway
- Underwater sprockets vary from the normal reversion wheel only in the design of the "flying" shaft bearing, which are optimally designed by RUD for even these use cases. Numerous use cases all over the world prove their high availability.


Underwater SOI

- Ideal for wet de-ashing systems
- Electronic circulation control optionally possible
- Assembly of outer wall at the trough
- Suitable for modifying old systems
- High-quality, robust and easy-running bearing technology
- Optimised bearing seal
- Easily accessible for maintenance works
- Deliverable in all reversing wheel dimensions
- Two design versions: with or without bearing shield in fixed casing hub

- 1 SOI REVERSION WHEEL
- 2 TROUGH WALL
- 3 CHAIN
- 4 BEARING SIGN
- 5 TROUGH BOTTOM
- 6 SCRAPER

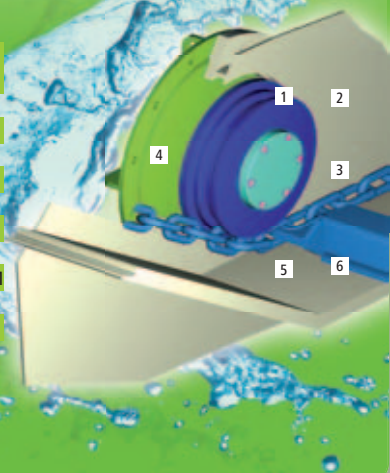


Submerged Overhung Idler (SOI)

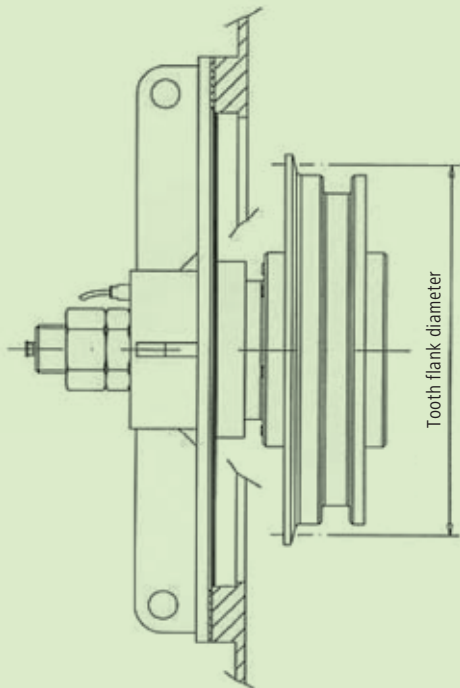

Design SOI 1		
Chain d x t in mm	PCD Ø	corresponding to the number of teeth
19 x 75	290	6
	384	8
22 x 86	331	6
	440	8
	549	10
26 x 100	386	6
	512	8
	639	10
30 x 120	426	6
	614	8
	766	10

Ordering example:
 SOI 1 22x86-400/790-10
 Reversion wheel with bearing shield for chain 22x86-R100 with 400 mm sprocket Ø and 790 mm Bearing shield Ø with electric circulation control (1), without automatic lubricator (0).
 Surface condition: Primed
 For connecting dimensions refer to dimension sheet on page 62.

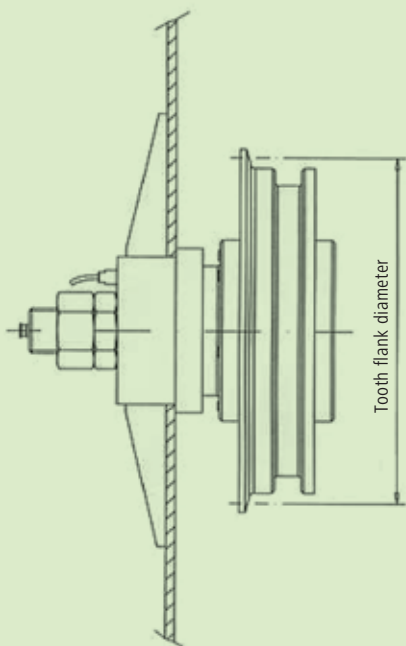

Design SOI 2		
Chain d x t in mm	PCD Ø	corresponding to the number of teeth
19 x 75	290	6
	384	8
	479	10
22 x 86	331	6
	440	8
	549	10

Ordering example:
 SOI 2 22x86-400/790-10
 Reversion wheel with bearing shield for chain 22x86-R100 with 400 mm sprocket Ø and 790 mm Bearing shield Ø with electric circulation control (1), without automatic lubricator (0).
 Surface condition: Primed
 For connecting dimensions refer to dimension sheet on page 62.

Pocket wheels

single, multi-part

Pocket wheel system



Multi-part pocket wheel

Chain d x t in mm	Z	PCD Ø	A	B	C	E _{max.}	F _{max.} = Hole-Ø in mm	Complete sprocket wheel approx. kg/piece
10 x 38	8	195	35.0	80	30	80	45.0	6.5
14 x 50	8	256	49	120	35	100	80.0	13.1
	9	288	49	140	45	90	100.0	15.2
	10	320	49	155	40	105	100.0	23.8
	12	384	49	155	40	105	100.0	37.4
16 x 64	8	327	56	160	45	125	110	27.2
	10	409	56	195	45	125	140	45.4
18 x 64	8	328	64	150	45	125	90	30.5
19 x 75	8	384	66	185	45	145	130	40.5
	10	479	66	225	45	145	150	68.0
22 x 86	7	387	77	155	65	165	90	45.0
	8	440	77	200	65	165	120	59.5
	10	549	77	225	65	165	140	106.0
26 x 100	8	512	91	235	75	175	150	89.0
	10	639	91	335	75	175	230	215.0
30 x 120	9	690	108	320	80	170	180	189.0
	10	766	108	360	90	180	240	243.0
34 x 136	9	783.0	122.0	380	90.0	240	260.0	335.0
38 x 144	8	738.0	130.0	355	125.0	250	240.0	316.0

Single-part pocket wheel

Chain d x t in mm	Z	PCD Ø	A	B	C	E _{max.}	Chain wheel compl. ca. kg / Pcs.	F _{max.} = Hole-Ø in mm
8 x 31	5*	100.3	40	62	25.0	68	4.5	45.0
	6	119.7	45	—	22.5	45	2.9	40.0
	7	139.3	40	70	27.5	55	4.5	40.0
	10*	198.1	43	80	25.0	50	6.5	48.0
10 x 38	5*	123.0	55.0	75	32.0	80	3.5	45.0
	6	147.0	35.0	85	30.0	80	3.5	55.0
	8	194.7	35.0	100	25.0	80	11.5	65.0
	10	243.0	35.0	100	30.0	80	21.0	65.0
14 x 50	12	291.0	35.0	100	30.0	80	22.5	65.0
	6	193.0	49	105	30	75	7.5	70.0
	7	225.0	49	135	30	65	12.0	85.0
	8	256.0	49	120	30	100	13.5	80.0
16 x 64	10	319.0	49	-	30	70	29.0	120.0
	12	383.0	49	160	30	100	23.5	120.0
	6	247.0	56	140	45	120	15.1	85.0
	8	328.0	56	160	45	125	21.5	120.0
18 x 64	10	409.0	56	195	45	125	35.4	140.0
	6	247	63.5	140	45	120	20.1	95.0
	8	328	63.5	150	45	125	25.5	110.0
19 x 75	8	385	66.0	185	45	130	40.0	125.0
	10	479	66.0	225	45	145	50.0	150.0
22 x 86	6	332.0	77.0	—	50.0	100	27.0	140.0
	7	386.0	77.0	265	65.0	165	50.0	150.0
	8	440.0	77.0	185	65.0	165	50.5	135.0
	10	549.0	77.0	300	65.0	165	100.0	180.0
26 x 100	8	512.0	91.0	235	75.0	175	90.0	150.0
	10	639.0	91.0	335	75.0	175	110.0	250.0
30 x 120	8	614.0	108.0	320	55.0	210	180.0	220.0

Properties:

- with replaceable, highly wear-resistant pocket wheel discs
- for difficult operating conditions
- preferably used as driving gear

Ordering example for the complete wheel:

Multi-part pocket wheel

For chain: **19 x 75**

Pocket number: **8**

Hole-Ø: ... mm

Dimension C: ... mm

Dimension E: ... mm

Number in piece **10**

Ordering example for pocket wheel disc:

Multi-part pocket wheel

For chain: **19 x 75**

Pocket number: **8**

Number in piece **10**

Properties:

- highly wear-resistant
- for medium and difficult operating conditions
- especially suitable as guide wheel

Ordering example:

Single-part pocket wheel

For chain: **19 x 75**

Pocket number: **8**

Hole-Ø: ... mm


Dimension C: ... mm

Dimension E: ... mm

Number in piece **10**

- Other sizes on request.

* without heat treatment

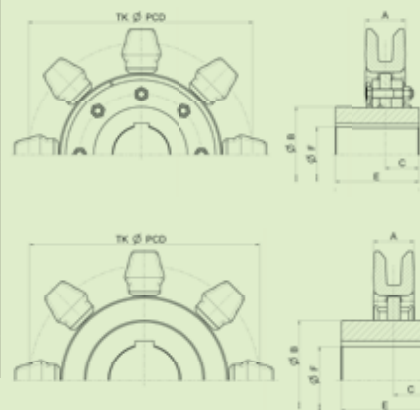

MEE-T attachment

System pocket wheel






MEE-T in one part for system pocket wheel

RUD Part no. with pin locking	RUD Part no. without pin locking	Chain d x t in mm	A	B	C	E	kg/piece
62930	62929	10 x 38	35	43	16	27	0.2
55158	50380	14 x 50	50	60	20	38	0.4
62676	50383	16 x 64	56	70	28	44	0.6
62677	50417	18 x 64	62	78	25	49	0.6
62678	50418	19 x 75	65	80	35	50	1.0
62680	50419	22 x 86	75	95	40	60	1.6
62681	50423	26 x 100	90	111	45	70	2.5
62683	50424	30 x 120	105	128	55	81	4.6
62685	50425	34 x 136	115	144	65	91	6.0
7992593	-	38 x 144	128	160	65	101	7.3

Properties:

- for difficult operating conditions
- scraper height up to 1.5 times the chain link width
- double-strand conveyor and multiple-strand conveyor systems
- can be welded to anything
- securing with locking pin if necessary
- run across pocket wheels and plain wheels
- Deliverable with and without pin locking

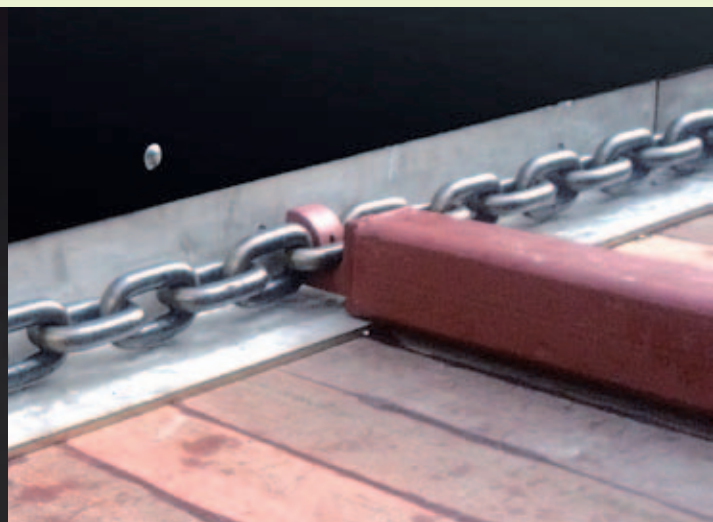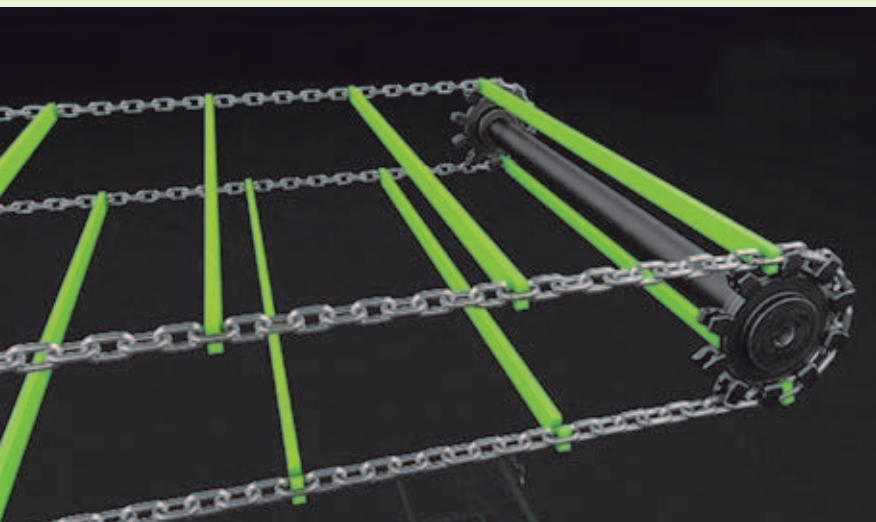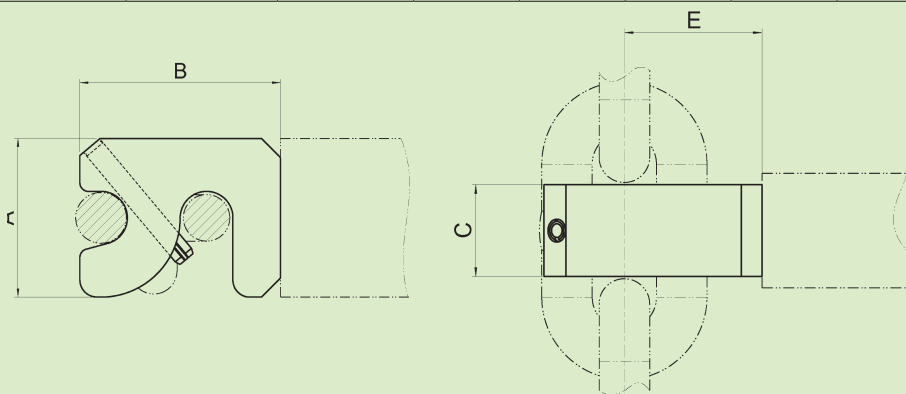

MEZ-T attachment


System pocket wheel








MEZ-T Attachment								
RUD Part no.	chain d x t in mm	A	B	C	E	F	G	kg/Pair
7102680	10 x 38	35	100	12	37	11.0	30	0.3
62686	14 x 50	50	130	16	52	13.5	36	0.7
62687	16 x 64	56	150	24	58	17.5	40	1.3
63039	18 x 64	62	155	24	63	17.5	40	1.5
63040	19 x 75	65	165	30	65	17.5	46	2.0
62688	22 x 86	75	190	36	75	22.0	50	3.2
62689	26 x 100	90	220	44	86	22	60	5.5
62690	30 x 120	105	250	56	96	26	70	9.3



Properties:

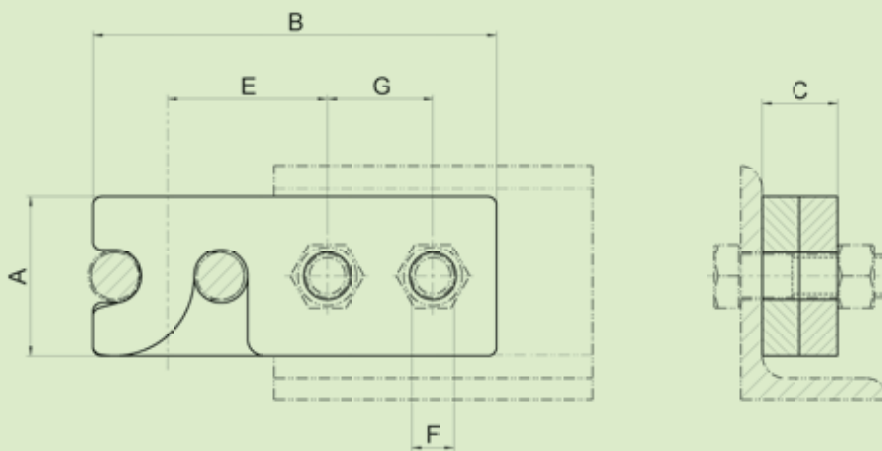- for medium to difficult operating conditions
- for scraper height up to 1.5 times the outer chain link width
- assembly and disassembly in case of tensioned chain possible
- double-strand conveyor and multiple-strand conveyor systems
- run over pocket wheels and plain wheels
- Deliverable with and without pin locking





BULKOS bucket attachment systems							
	Bucket width [mm]	Max. conveyance capacity [m ³ /h]	Max. dimension between axes [m]	Max. conveyance speed [m/s]	Max. recommended granulation [mm]	Max. temperature of material to be conveyed [°C]	Recommended material to be conveyed
RUD central chain	Recommended traction mechanism RU80, RU150, RU200; breaking force 800 - 2000 kN						Cement, limestone, gravel, coke, slag, clinker
	400 - 1100 simple 2 x 400 - 2 x 1000 tandem	600 1200	70	1.7	120	250	
RUD System 65*	Recommended traction mechanism Round link steel chain 14x50 - 34x136; breaking force 140 - 720 kN						Cement, limestone, gravel, coal, sugar beets, clinker, potassium, rock salt, fertiliser, soda
	250 - 1600	1100	65	1.5	120	200	
RUD 2win*	Recommended traction mechanism Round link steel chain 14x50 - 34x136; breaking force 140 - 720 kN						Cement, limestone, lump lime, soda, gypsum, fertiliser, filter dust
	250 - 1250	700	60	1.5	100	200	
RUD fabric belt	Recommended traction mechanism: Fabric belts are available with 4-6 EP 630-EP 1600 inserts						Cement, limestone, gypsum, sugar, coal, aluminium oxide, sand, potassium, rock salt, slag, filter dust
	160 - 1250	700	45	1.7	40	120	
RUD steel cord belt	Recommended traction mechanism: Steel cord belts are available with a breaking force of 800...3150 N/mm belt width.						Cement, limestone, coal, potassium, rock salt, slag
	315 - 1600	1200	120	1.7	80	120	

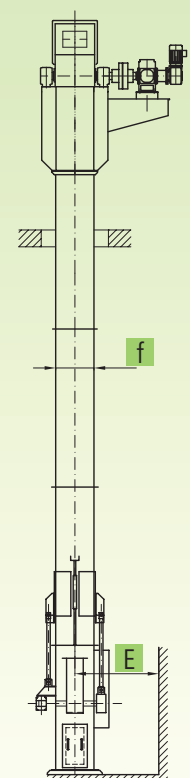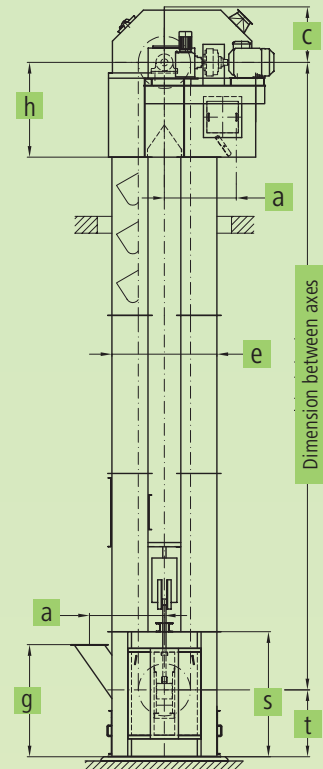

Problems of the des DIN system

- Chain bracket has a double function
 - transmission of tension of the chain loop
 - fixing the bucket to the chain loop and absorbing bucket strain
- Weak point double-function may lead to fatigue fractures
- Additional consequences may be loose screw fittings
- Even over-dimensioning in heavy conveyor operations does not solve these problems

Solution RUD multi-link-fastenings 2win and system 65 (see page 39/40)

- Assembly over several chain links
- No transmission of tension from the chain to the attachment
- Gentle introduction of the scooping force into the chain strand
- Minimizing wear in the chain joints

At a glance



BULKOS bucket elevators

THE BULK SOLUTION



These are specially designed for the dust-free, vertical conveyance of powdery, granular, lumpy and high temperature bulk materials.



Highly wear-resistant chains, traction wheels or sprockets ensure that even abrasive materials are transported reliably. Specially designed chaintype



bucket elevators are available in either centrifugal/gravity, positive or central discharge designs dependent on the application.

CHAIN ROUND STEEL CONNECTORS
SPROCKET WHEELS
ATTACHMENTS
SCRAPER BARS
REVERSION WHEELS
POCKET WHEELS
FORKED CHAINS
BUCKET ATTACHMENTS
CENTRAL CHAINS
BUCKET ELEVATORS
CONVEYOR SYSTEM

Conveying capacities, reference values for approx. 75 % filling												
Bucket DIN 15233												
	Width [mm]	160	200	250	315	400	500	630	800	1000	1250	1600
	Conveyance speed [m/s]	1.05	1.05	1.15	1.15	1.20	1.20	1.34	1.34	1.48	1.48	1.48
	Conveyance capacity [m³/h]	9	11	20	25	44	61	94	129	196	305	391
Bucket DIN 15234												
	Width [mm]	160	200	250	315	400	500	630	800	1000	1250	1600
	Conveyance speed [m/s]	1.05	1.05	1.15	1.15	1.20	1.20	1.34	1.34	1.48	1.48	1.48
	Conveyance capacity [m³/h]	14	17	31	39	70	98	151	207	304	473	605
Special bucket												
	Width [mm]	160	200	250	315	400	500	630	800	1000	1250	1600
	Conveyance speed [m/s]	1.15	1.15	1.25	1.25	1.28	1.33	1.49	1.49	1.48	1.48	1.48
	Conveyance capacity [m³/h]	18	23	41	52	91	133	209	287	353	558	715
High-capacity bucket conveyor												
	Width [mm]	160	200	250	315	400	500	630	800	1000	1250	1600
	Conveyance speed [m/s]	1.15	1.15	1.25	1.25	1.28	1.33	1.49	1.49	1.48	1.48	1.48
	Conveyance capacity [m³/h]	27	34	59	75	129	185	288	397	499	789	1010

Dimension*												
Bucket width	b	160	200	250	315	400	500	630	800	1000	1250	1600
Head	a	724	724	904	904	1004	1139	1264	1410	1673	1747	1747
	c	540	540	695	695	785	875	955	1050	1320	1340	1340
	h	850	850	1050	1050	1250	1450	1600	1800	2100	2300	2300
Funnel	e	1000	1000	1250	1250	1400	1600	1800	2000	2450	2550	2550
	f	280	355	450	545	660	770	900	1110	1300	1600	2000
Foot	a	724	724	904	904	1004	1139	1264	1410	1673	1747	1747
	g	1220	1220	1350	1350	1500	1700	1900	2100	2450	2500	2500
	a	670	670	800	800	880	970	1080	1300	1550	1550	1550
	s	1320	1320	1450	1450	1600	1800	2000	2200	2750	2750	2750
Expansion distance	E	900	1000	1200	1300	1500	1600	1800	2100	2500	2900	3500

*) Not included centre discharge bucket elevators with bucket attachment SWA.



The **bucket elevator casings** are selfsupporting, but they require horizontal guides at least every 15 meters and below the elevator head. **The bucket elevator head** comprises a lower section with doors to access the adjustable discharge plate, and braced bearing mountings, for the pedestal bearings which support the drive shaft, the shaft exit points use grease filled radial shaft seals. The upper sections comprise a multipart removable hood with an inspection door. A drive platform is mounted on the side of the lower part of the head for supporting a wide variety of commercially available drives. If required a maintenance platform and or an overhead support/ service beam can be fitted if required. An elevator drive normally consists of a geared motor unit, which is normally connected to a frequency controller for maintenance purposes. For higher power requirements, we recommend a drive unit with a bevel spur gearbox, and standard motor optionally with ancillary drive. Starting characteristics can be optimized by a hydraulic clutch or an electric soft start.

The **double or single leg casing** is torsionally rigid sheet metal housing, constructed of standard section lengths with flange connectors. The maintenance and assembly door position should preferably be located in the elevators raising casing leg, approximately 0.8 m above a platform.

The **elevator boot** is optionally designed with either internal, oil-filled bearings or external pedestal bearings. With external bearings, the shaft exit points are sealed by gray cast-iron stuffing boxes. There are large assembly doors and cleaning doors on both sides. The chain takeup tension is generated by a weight or spring-loaded spindle take-up device.

Depending on the type of chain used, RUD driving wheels are either non-toothed chain pulleys with replaceable, highly wear-resistant segments, or toothed sprocket wheels with replaceable, highly wear-resistant teeth. The **RUD return wheels** have replaceable, highly wear-resistant segments which in certain designs incorporate guide discs.


Buckets are manufactured according to DIN or our works standard. The materials used are steel, stainless steel, or rubber.

Buckets are attached by chain shackles, bolted clamping clips, plug-in attachments or angle brackets.

The **chains** are either hardened, round link chains to DIN Standard or works standard chain designs made of special, highly wear-resistant alloy steel. Engineering style chains are also used, as either double or single central chains.

Standard **safety devices** such as speed governors and level indicators, to monitor the operating status of the bucket elevator are incorporated.

Additional **accessories** are available.

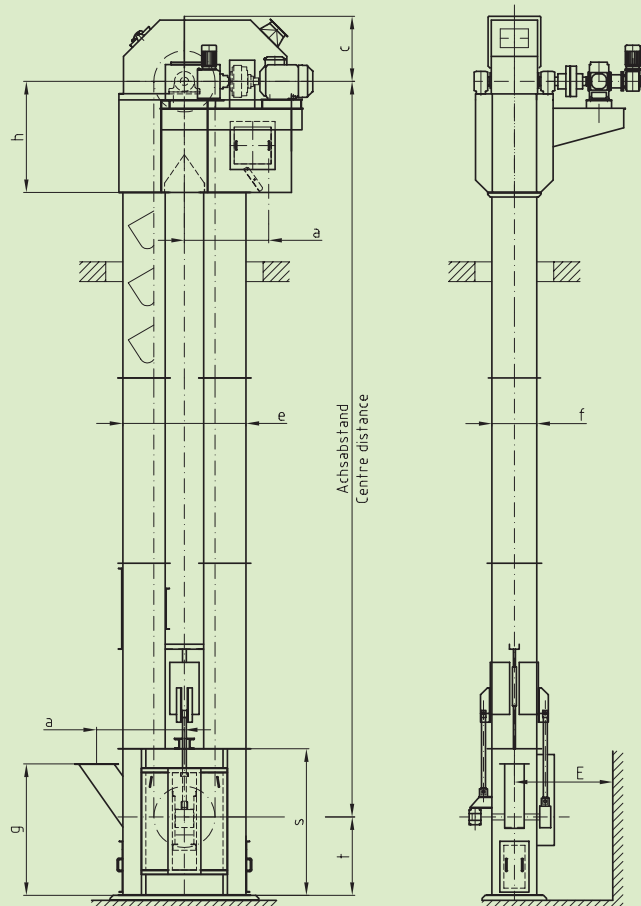


Back-wall bucket attachment 2win



Back-wall bucket attachment 2win




RUD Part no.	Chain d x t in mm	A	B	G	H	I	K	Weight [kg]
7998699	14 x 50	124	40	M14	30	56	39	0.9
7998700	16 x 64	156	43	M16	35	63	45	1.3
8503775	19 x 75	180	50	M20	40	80	53	1.6
8503776	22 x 86	207	58	M24	50	91	62	2.4
8503777	26 x 100	240	60	M24	50	105	71	3.4
7996145	30 x 120	288	75	M30	60	126	84	6.0
7993608	34 x 136	327	92	M36	70	147	96	9.3

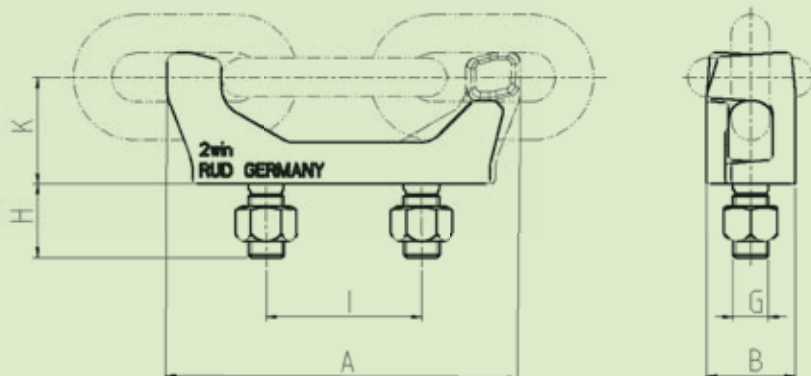

Properties:

- for using bucket conveyors with up to 60 m height
- endless chain strands can be used
- short assembly and disassembly times, without special tools
- bucket attachments runs over sprocket wheels and plain wheels
- suitable for replacing all the DIN bucket attachments in round steel link chain bucket elevators except side-wall attachments

Assembly sequence:

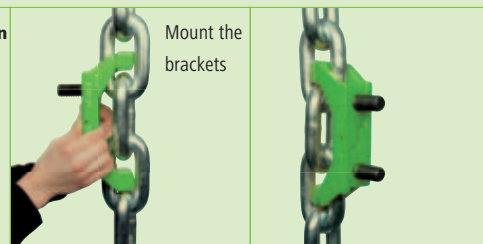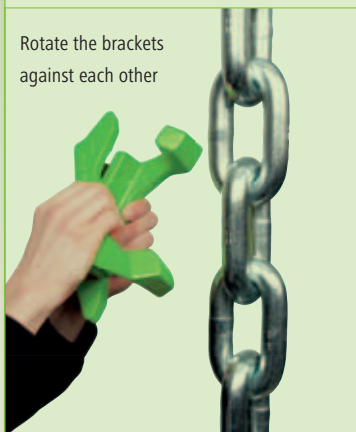

ROUND STEEL CHAIN
CHAIN CONNECTORS
SPROCKET WHEELS
ATTACHMENTS
SCRAPER BARS
WHEELS
REVERSION WHEELS
POCKET WHEELS
FORKED CHAINS
BUCKET ATTACHMENTS
CENTRAL CHAINS
BUCKET ELEVATORS
CONVEYOR SYSTEM

Side-wall attachments

SWA




Side-wall attachments SWA								
RUD Part no.	Chain d x t in mm	A	B	G	H	I	K	Weight [kg]
7992042	16 x 64	140	81	M16	35	105	37	0.6
7982949	19 x 75	164.4	98.5	M20	40	124	47	1.3
7992040	22 x 86	190	112	M20	40	145	51	1.4
7987910	26 x 100	224	130.5	M24	45	170	60	2.8
7990872	30 x 120	258.5	153.5	M30	55	198.5	71	3.5



Properties:


- For using in slow-running bucket elevators with gravity drain, central discharge bucket conveyors and return-feed bucket conveyors
- endless chain strands can be used
- easy assembly in case of variable bucket distance
- two-link bucket attachment for a smooth run across the gears

Assembly sequence

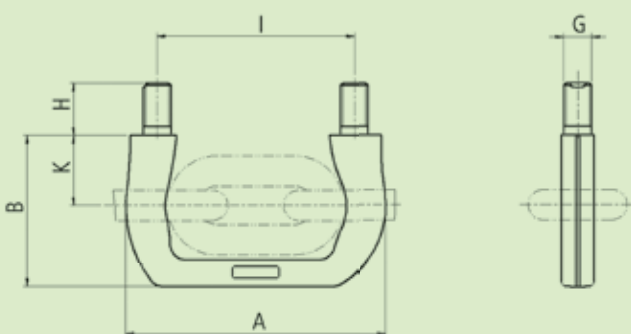

for central discharge bucket conveyors

Centre discharge bucket elevators

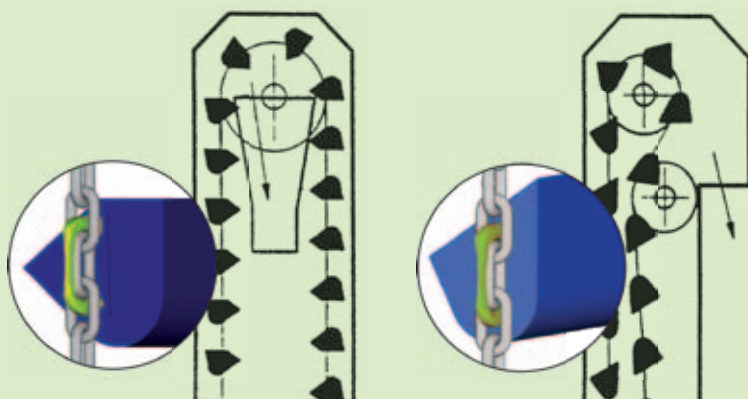

Chain wheel for bucket elevators



Chain wheel for bucket elevator

Chain d x t in mm	PCD Ø	B	C	D	Number of segment pairs	Weight of the complete sprocket approx. kg/piece
14 x 50	500	19	55	120	4	70
16 x 64	630	22	62	140	4	135
19 x 75	710	27	71	160	4	170
22 x 86	800	29	79	170	4	250
26 x 100	900	33	93	200	4	350
30 x 120	1000	40	110	200	4	450
34 x 136	1250	44	114	220	4	500


Properties:

- Especially suitable for RUD systems **2win** and SWA
- finish-drilled and grooved as per customer requirement
- robust welded construction with replaceable bearing ring segments
- hardened bearing ring segments for the drive
- unhardened bearing ring segments for deflection


Ordering example:

Chain sprockets for system: **2win**
 Design: **Complete**
 PCD Ø in mm: **710**
 For chain: **19 x 75**
 Number in pieces: **4**
 Hub bore hole: **120^{H7}**
 Segments: **hardened**

Special grooved wheels and guide wheels on request.

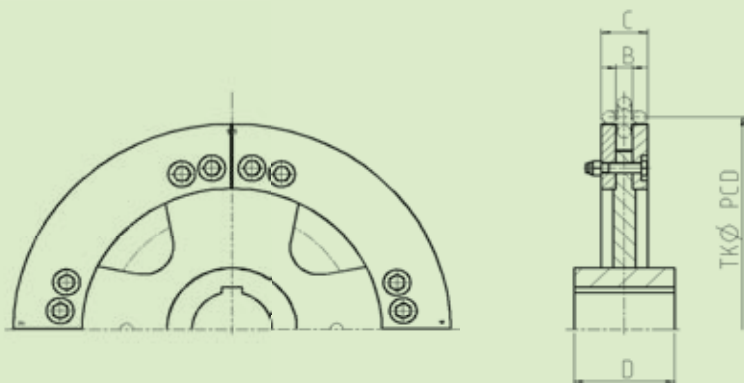

Assembly of chains across the smooth drive chain wheels in the bucket elevator.

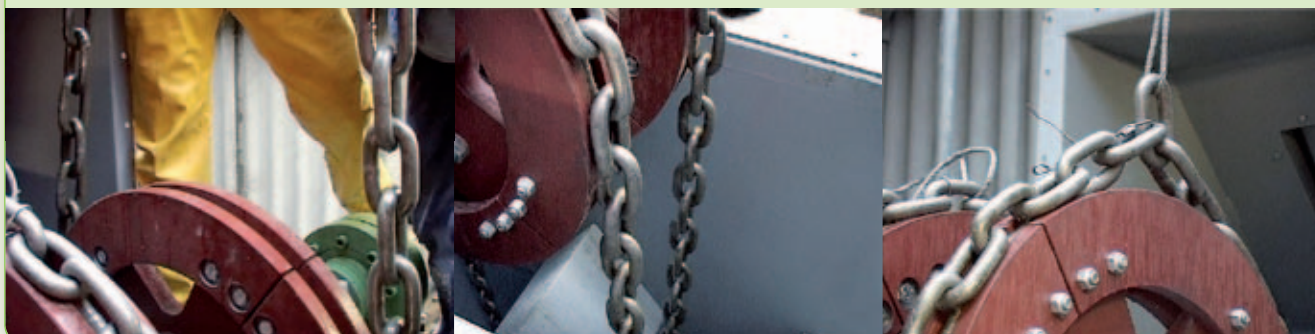

Bucket attachment System 65




Bucket attachment System 65 (two-link-mounting - plug in attachment - double – SD)¹

Chain d x t in mm	Flat steel		Plug in attachment flat	Plug in attachment round	A	B	C	E	F	G	H	I	K	Complete weight [kg]
	Part A	Part B												
	RUD Part no.													
14 x 50	50142	50144	61160	61162	65	55	8	33	25	100	150	49	93	1.0
16 x 64	50146	50150	61163	61165	80	65	10	40	31	128	190	58	110	2.0
19 x 75	50152	50154	61166	61168	95	75	12	45	40	150	230	68	130	3.2
22 x 86	50162	50186	61169	61171	110	85	15	50	44	172	260	80	158	5.1
26 x 100	50197	50204	61172	61173	120	100	15	61	45	200	290	94	172	6.8
30 x 120	50206	50208	61174	61175	140	125	15	75	50	240	340	109	190	10.0
34 x 136	51677	51679	54713	54714	155	130	15	80	54	272	380	122	210	13.0

Properties:


- for heavy operating conditions in the bucket elevator area
- robust and highly wear-resistant
- easy assembly and disassembly of buckets on the chain

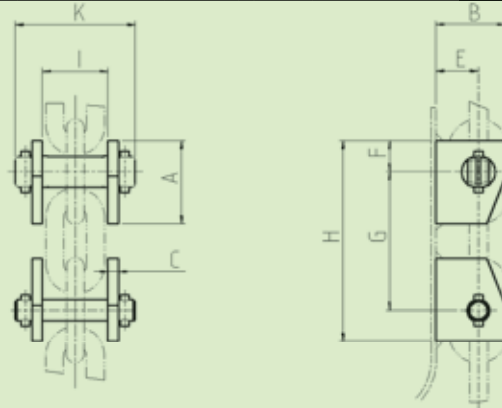

¹ The complete version includes the following components:

- 2 x flat steel part A, 2 x flat steel part B,
- 1 x plug-in attachment round,
- 1 x plug-in attachment flat.

A repeat order for individual parts such as flat steels and plug-in attachments can also be placed separately.

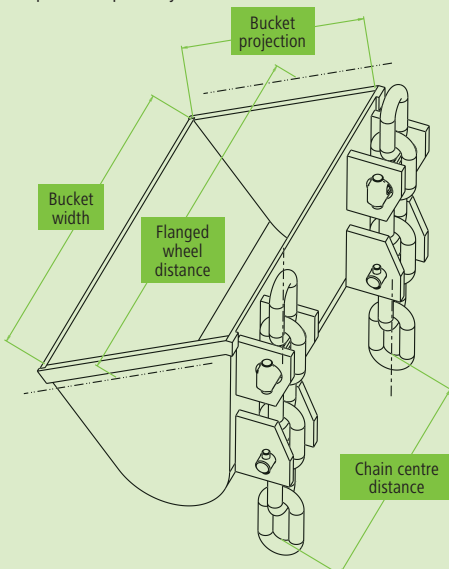


Reversing wheel for system 65 bucket elevators



Reversing wheel for system 65 bucket elevators

Support Ø G	A	C	E	Weight kg/piece
540	110	70	140	120
575	100	70	140	125
630	100	70	140	135
730	120	70	140	185
800	120	80	160	210
870	140	80	160	250
980	190	80	160	420
1095	190	80	160	510
1180	195	100	200	620
1280	195	70	140	560



Properties:

- The bearing ring and the hub plate are stable welded constructions
- Weight-loaded initial tensioning is not required at the deflection due to the interlocked drive. The chain is redirected into uncompressed condition
→ reduction in wear

Ordering example:

Pulley block: **complete**

For chain: **30 x 120**

Support Ø in mm: **980**


Dimension C in mm: **80**

Dimension E in mm: **160**

Ø Hub bore hole: **90^{H7}**

Chain centre distance = ...

Flanged wheel distance = ...

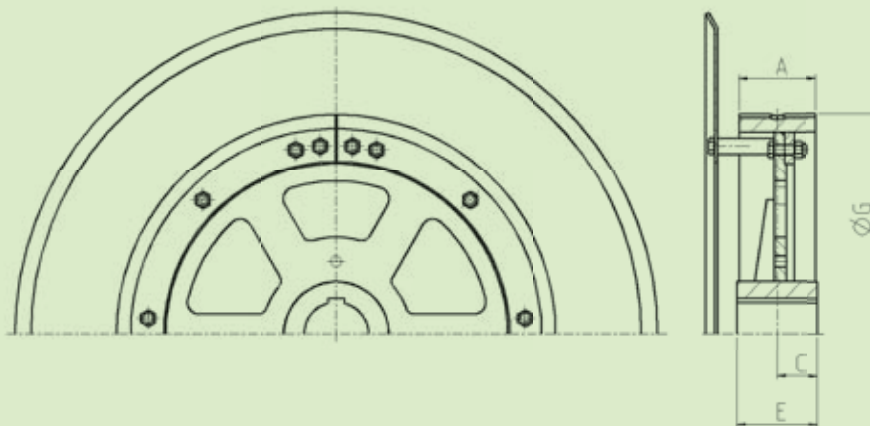

Sprocket wheel

System 65



Sprocket wheel with replaceable individual teeth¹

Chain d x t in mm	Teeth	PCD Ø	B	C	E	Gewicht kg/Stk.
14 x 50	16	510	160	50	110	71
	20	637	200	85	170	115
16 x 64	15*	612	200	85	170	125
	17	694	201	75	150	148
	18	734	200	75	150	121
	20	816	210	90	180	148
19 x 75	15*	718	240	75	150	132
	17	813	280	75	150	209
	19	908	270	90	180	289
22 x 86	15*	823	275	90	180	238
	16	878	275	90	180	242
	17	932	270	90	180	299
	18	986	300	100	200	350
26 x 100	14*	894	300	100	200	270
	15	956	300	100	200	290
	16	1020	300	100	200	403
30 x 120	17	1084	300	100	200	410
	14*	1072	300	100	200	409
	15	1148	380	100	200	371
34 x 136	16	1225	300	100	200	446
	17	1300	325	125	250	501
	14*	1214	370	100	200	489
34 x 136	15	1301	370	100	200	488
	16	1387	390	110	220	677

Properties:

- replaceable individual teeth are made of MnCr special steel
- the teeth are highly wear-resistant
- surface hardened
- hub and secondary sheaves are welded construction

Ordering example:

Sprocket wheel:

For chain: **22 x 86**

Number of teeth: **16**

Dimension C in mm: **90**

Dimension E in mm: **180**

Ø Hub bore hole: **180^{H7}**

alternative:

Individual tooth:

with screw joint


For chain: **22 x 86**

Number of teeth: **16**

¹ Other dimensions on request

* Preference sizes in accordance with DIN 15251 (shade)

Teeth with increased link support also available. For this refer to page 20.

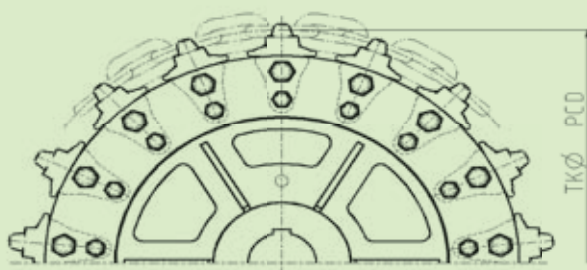

RUD central chain

RU80 · RU150 · RU200



Components of central chain

The central chain consists of four basic elements, inner plates, bolts, outer plates and bucket attachments.

The chain can be easily opened, shortened or extended by simply bending the chain links at every position without the tool in an assembly- and disassembly-friendly way.

A favourable force distribution and tolerance compensation is achieved using the bolt bearing at the outer plate, which is also carried out in the bushings.

The buckets are mounted using bilaterally stable bucket attachments, which are pushed to the bushings of the outer plates. Increase in the useful life in case of wear of the chain can be achieved once again by turning over the chain.




Assembly sequence:



1. Insert the bolts



2. Insert the outer plates

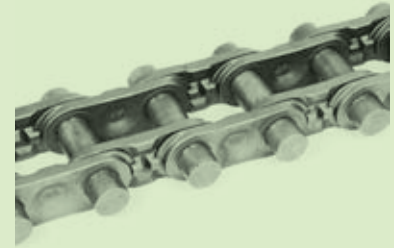

3. Stretch the chain – finished without tools

RUD central chain


RU80 · RU150 · RU200



Central chain

Order number	Chain size	Strand length	Division [mm]	Breaking force [kN]	Possible bucket distance [mm]	Usual bucket width [mm]
7104523	RU80	1080	180	800	360/720	400-710
7995618	RU150	1080	180	1500	360	400-1000
7992038	RU200	1080	180	2000	360	600-1100


RU80

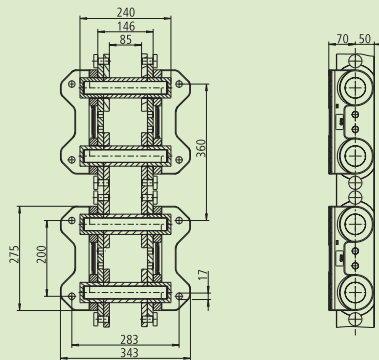


Properties:

- Hinge points: Bolts float-mounted
→ high wear volume
- Assembly: without special tool possible
- Standard strand length: 1080 mm
packaged in an assembly-friendly way

RU150

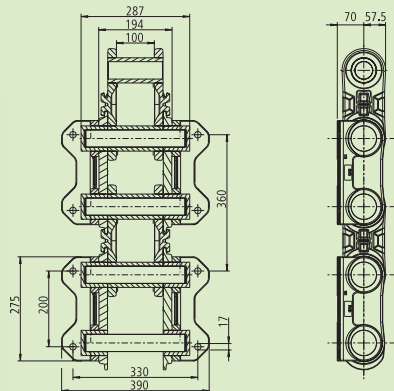


RU200

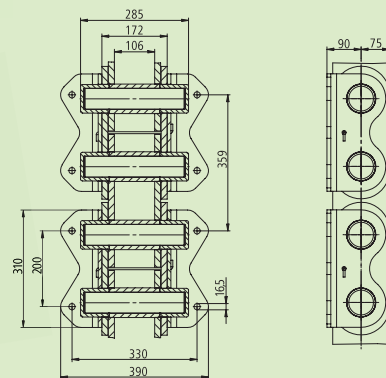

RUD central chain

Drive wheels · Tension sprockets

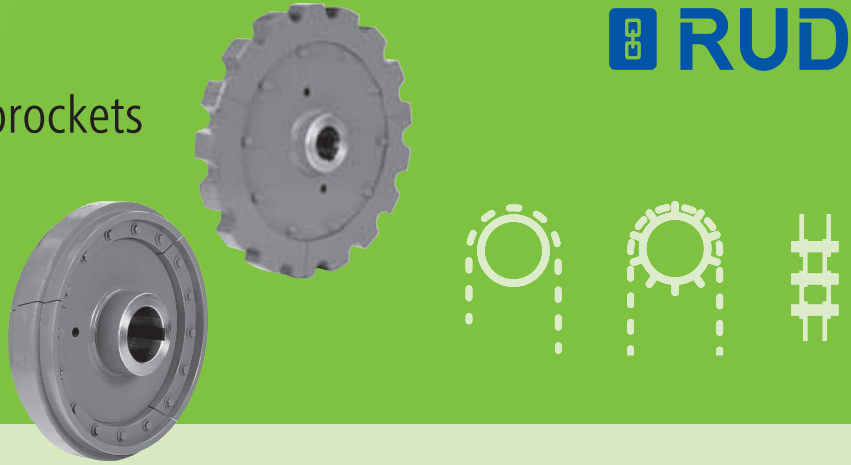

Drive wheel					Tension sprocket			usual chain size
Drive wheel PCD Ø [mm]	Corr. teeth no. of the tension sprocket	B max [mm]	E max [mm]	Weight approx. [kg]	B max [mm]	E max [mm]	Weight approx. [kg]	
695	12	350	300	380	220	200	230	RU80
800	14	400	360	480	220	200	300	RU80 / RU150
900	15	400	360	570	220	200	360	RU80 / RU150
960	16	370	220	390	220	200	460	RU150
1000	17	400	300	740	220	200	550	RU80 / RU150
1170	20	420	300	880	220	200	700	RU150 / RU200
1300	22	450	300	970	220	200	765	RU150 / RU200


Properties:

- running threads made of Cr-Mo steel
- running surface inductively hardened

RUD Drive wheel

Ordering example:



Complete drive wheels for RUD central chain: **RU80**
PCD: **800 mm**

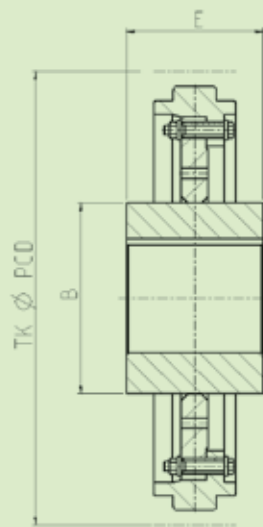


RUD Tension sprocket

Ordering example:

Complete tension sprocket for RUD central chain: **RU80**
Number of teeth: **14**

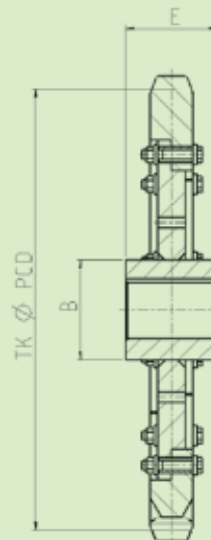

Belt type bucket elevators

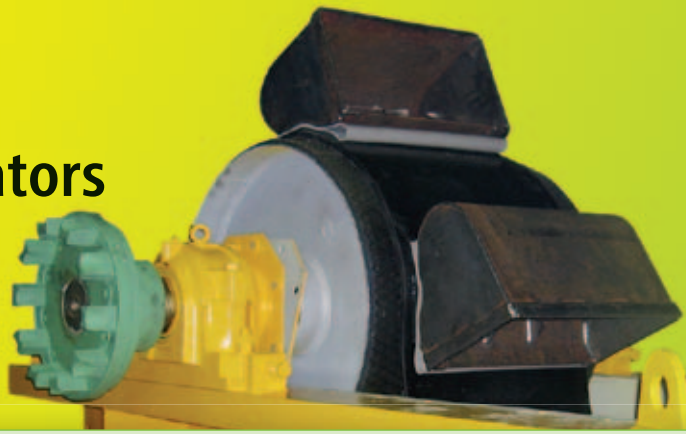


Belt type bucket elevator designs using textile or steel reinforced belts transport materials dust-free without difficulty, even to great heights and are especially suitable for the


continuous vertical conveyance of free flowing bulk materials. Suitable adaptations are made to handle coarse-grained or higher temperature materials.

Conveying capacities, reference values for approx. 75 % filling


Bucket DIN 15233

	Width [mm]	160	200	250	315	400	500	630	800	1000	1250	1600
	Conveyance speed [m/s]	1.05	1.05	1.15	1.15	1.20	1.20	1.34	1.34	1.48	1.48	1.48
	Conveyance capacity [m³/h]	10	12	25	31	45	63	99	140	224	316	405


Bucket DIN 15234

	Width [mm]	160	200	250	315	400	500	630	800	1000	1250	1600
	Conveyance speed [m/s]	1.05	1.05	1.15	1.15	1.20	1.20	1.34	1.34	1.48	1.48	1.48
	Conveyance capacity [m³/h]	16	20	38	48	71	101	160	225	348	490	627

Special bucket

	Width [mm]	160	200	250	315	400	500	630	800	1000	1250	1600
	Conveyance speed [m/s]	1.15	1.15	1.25	1.25	1.28	1.33	1.49	1.49	1.66	1.66	1.66
	Conveyance capacity [m³/h]	25	32	56	70	105	154	246	353	512	726	930

High-capacity bucket conveyor


	Width [mm]	160	200	250	315	400	500	630	800	1000	1250	1600
	Conveyance speed [m/s]	1.15	1.15	1.25	1.25	1.28	1.33	1.66	1.66	1.66	1.66	1.66
	Conveyance capacity [m³/h]	27	34	64	81	134	198	321	480	652	850	1088

Dimension

Bucket width	b	160	200	250	315	400	500	630	800	1000	1250	1600
Head	a	724	724	904	904	1004	1139	1264	1410	1673	1747	1747
	c	540	540	695	695	785	875	955	1050	1320	1340	1340
	h	850	850	1050	1050	1250	1450	1600	1800	2100	2300	2300
Funnel	e	1000	1000	1250	1250	1400	1600	1800	2000	2450	2550	2550
	f	280	355	450	545	660	770	900	1110	1300	1600	2000
Foot	a	724	724	904	904	1004	1139	1264	1410	1673	1747	1747
	g	1220	1220	1350	1350	1500	1700	1900	2100	2450	2500	2500
	a	670	670	800	800	880	970	1080	1300	1550	1550	1550
	s	1320	1320	1450	1450	1600	1800	2000	2200	2750	2750	2750
Expansion distance	E	900	1000	1200	1300	1500	1600	1800	2100	2500	2900	3500

Belt type bucket elevators

Description

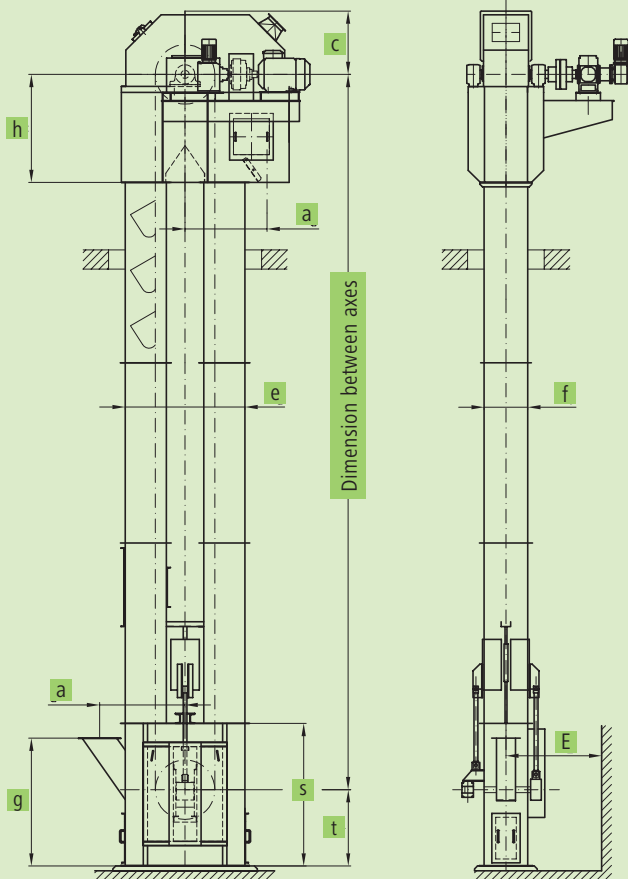

The **bucket elevator casings** are self-supporting, but they require horizontal guides at least every 15 meters and below the elevator head. The **bucket elevator head** comprises a lower section with doors to access the adjustable discharge plate, and braced bearing mountings, for the pedestal bearings which support the drive shaft, the shaft exit points use grease filled radial shaft seals. The upper sections comprise a multipart removable hood with an inspection door. A drive platform is mounted on the side of the lower part of the head for supporting a wide variety of commercially available drives. If required a maintenance platform and or an overhead support/ service beam can be fitted if required.

An elevator drive normally consists of a geared motor unit, which is normally connected to a frequency controller for maintenance purposes.

For higher power requirements, we recommend a drive unit with a bevel spur gearbox, and standard motor optionally

with ancillary drive. Starting characteristics can be optimized by a hydraulic clutch or an electric soft start.

The **double or single leg casing** is a torsionally rigid, sheet metal housing constructed of standard section lengths with flange connectors. The maintenance and assembly door position should preferably be located in the elevators raising casing leg, approximately 0.8 m above a platform.

The **elevator boot** is optionally designed with either internal, oil-filled bearings or external pedestal bearings. With external bearings, the shaft exit points are sealed by gray cast-iron stuffing boxes. There are large assembly doors and cleaning doors on both sides. The belt take-up tension is generated by a parallel weight or spindle take-up device.

Whereas the parallel weight take-up automatically compensates for belt stretch, the spindle take-up requires manual readjustment. The **driving pulley** has a structured rubber covering. Easy to replace, bolt-on, dished rubberized segments are available upon request.

The **take-up pulley** is designed as a cage drum. Internal cones guide any material that enters the drum out to the sides.

The **buckets** are manufactured according to DIN or our works standard. The materials used are steel, stainless steel, aluminum, plastic or rubber. The **bucket attachments** are selected according to the loads to be handled. Rubber strips are fitted between the belt and the backs of the buckets. The buckets are attached by means of belting bolts, spherical or half-round segments with countersunk bolts. The belts are available with textile or wire-cable reinforcement. Hot-material rubber compounds are used for transporting high-temperature materials. The belt is jointed by mechanical connecting brackets or claw connectors. Belts with a low linear expansion can be continuously vulcanized.

Standard **safety devices**, comprising off-track governors, speed governors and level indicators, to monitor the operating status of the bucket elevator are incorporated.

Additional **accessories** are available.



The RUD drive drum design, with a cylindrical central section and laterally decreasing diameter, ensures

- uniform load distribution across the width of the belt
- low wear on the friction lining
- stable running of the belt and so
- a longer service life for the belt



The RUD drive drum design with interchangeable friction lining:

- The friction lining is easily exchangeable when worn
- It can be exchanged without removing the drum or opening the belt
- This makes it easier to maintain and so
- Reduces down times
- The segments can be re-used after replacing the rubber



The RUD parallel tension unit ensures:

- automatic extension compensation of the belt
- a low pretension force and so low loading
- stable running of the belt
- a maintenance-free design








RUD bucket attachments

- have soft rubber inserts between the backwalls of the buckets and the belt, which prevent the material jamming and reduce the effects of heat on the belt
- can optimal adapt to the convexity of the drums
- have always the optimal fastening element for the particular load
- have extremely high tear-off strength when used with steelrope belts, even in the coarse grain range



RUD steel-cable belts have

- a tensile strength of 800-3150 N/mm belt width and a low linear elongation of maximally 0.3%. This means that the belt never needs shortening during its entire service life.
- steel cross-bracing on both sides to give high transverse rigidity, and so optimal straight running and high tear out strength of the buckets.
- hot material rubber compositions for conveying material at a continuous temperature of up to 130°C, and temperature-resistance up to a maximum 10°C peak load.
- 5 mm thick cover plates on both sides and solid rubber edge protection for a long service life, even when handling highly abrasive materials.
- bucket attachment holes cut by water jet to ensure the highest quality
- belt ends prepared in the works for endless connection with mechanical belt connectors. Endless closure can also be achieved by hot vulcanization.

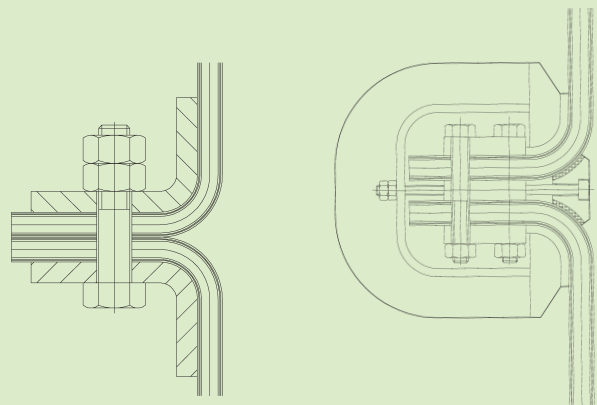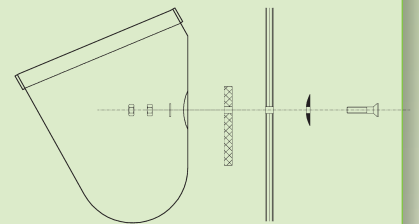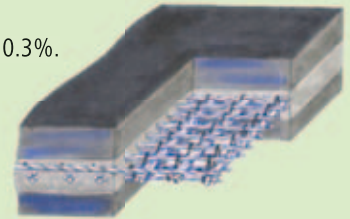


Trough chain conveyor



The **drive station** has flange or pedestal bearings for the drive shaft, depending on the size. Sealing is provided by grease filled, double radial shaft seals. The entire drive station together with the inspection door can be dismantled for easy maintenance. The drive consists of a standard geared motor unit mounted on the bracket attached to the side. Suitable safety clutches can be provided to prevent overloads.

The **trough** consists of individual, standard-length sections with connecting flanges. Hold-down rails are recommended for most of the materials to be conveyed. These prevent the material from building up and thus the chain climbing. For moderately abrasive materials, the side walls and base plate are protected by manganese alloy steel against wear. Fusion-cast basalt linings or liner plates with hard surface welding are recommended for use with highly abrasive materials. In special cases, the trough floor can be designed to act as a material pad.

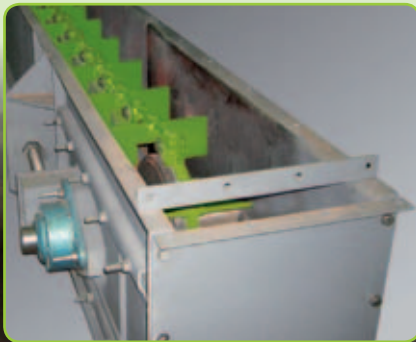

The **take-up station** has flange bearings to hold the take-up shaft. The shaft exit points in the housing are equipped with grease filled, double radial shaft seals. The entire station together with the inspection door can be dismantled for easy maintenance. The chain take-up is generated and set by spring-loaded pressure screws.

The **driving and return sprockets** are highly wear-resistant and have interchangeable, hardened toothed segments.

The standard **conveyor chains** used are forged, fork-sprocket chains that have been heat-treated or case-hardened.

The resistance to wear can be further increased by hard surface welding. Available options are: highly wear-resistant RUD round steel chains, bushed transporting chains according to DIN 8165 and block chains.

Standard **safety devices**, comprising speed governors and take-up screw monitors, detect the operating status of the trough chain conveyor.

Additional **accessories** are available.




FORKY

Forked-link chains


Single · double strand



FORKY

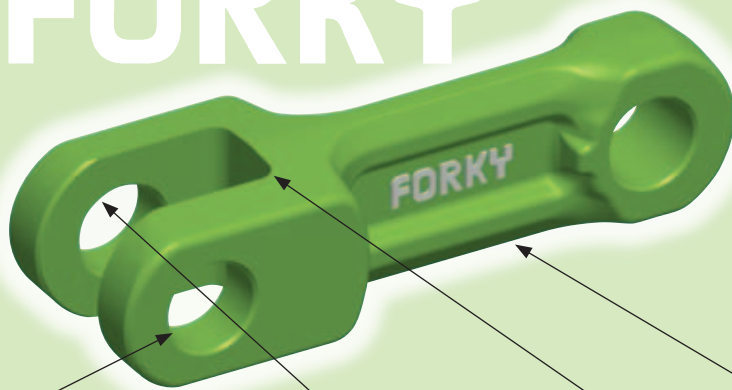

Convincing quality and safety

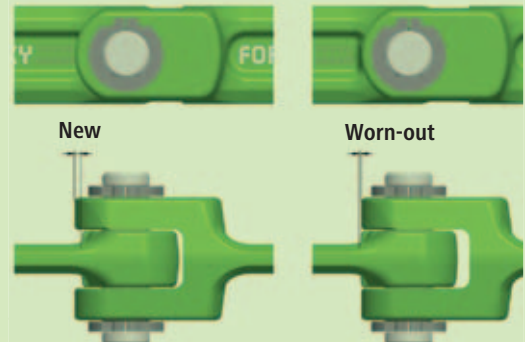

Deburred bores

- even inside the fork for highest endurance strength and reliability

Bores parallel to the axle with higher graduation accuracy

- for smoother running and hence
- for minimum wear

Extra large radii

- for more stability of the fork

Tensioning-optimised bar form



- for high lateral stiffness

Optical wear indicator

- the wear condition can be recorded at a glance at every individual chain link



FORKY – single strand

Size	Breaking force* (kN)	T (mm)	H (mm)	B (mm)	B _g (mm)	B _n (mm)	S (mm)	D (mm)
142 x 50 x 19	300	142	50	19	42	20	13	25
142 x 50 x 29	480	142	50	29	62.5	30	15	25
260 x 75 x 31	700	260	75	31	70	32	18	32

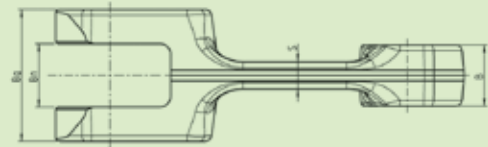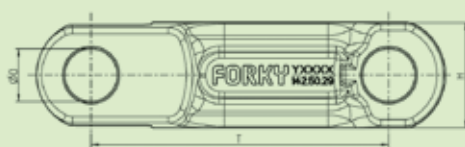

FORKY – double strand

Size	Breaking force* (kN)	T (mm)	H (mm)	B (mm)	B _g (mm)	B _n (mm)	S (mm)	D (mm)	N (mm)
142 x 50 x 19	300	142	50	19	42	20	13	25	12.5
142 x 50 x 29	480	142	50	29	62.5	30	15	25	12.5
200 x 50 x 25	440	200	50	25	58	26	17	25	12.5
250 x 60 x 30	520	250	60	30	70	31	20	30	12.5

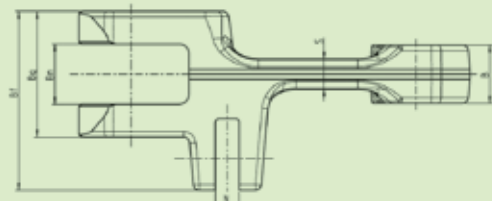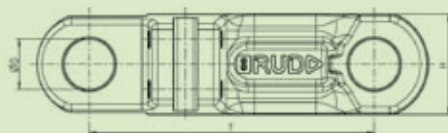

* Theoretical value for case-hardened forked-link chains

FORKY


Attachments

Componentes

Wheels · sprockets




Attachments for single strand forked-link chains **FORKY** – types of attachments *

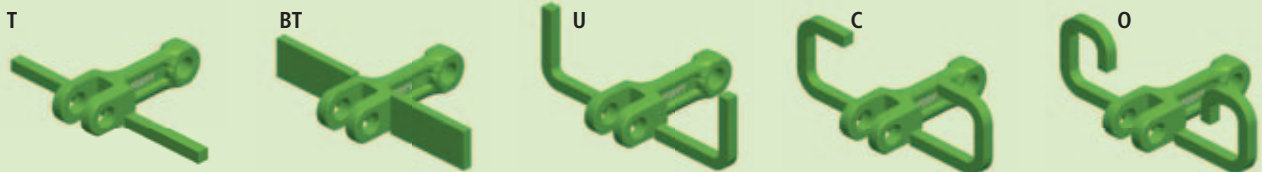

* All the attachment types can also be delivered with welded plates as per your specification! All types on request!

Attachments classification

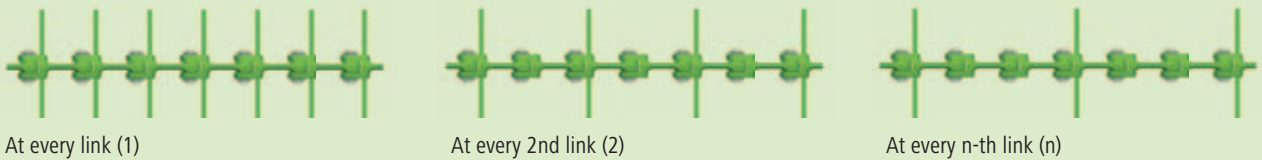


Attachments for double strand forked-link chains **FORKY** – types of attachments *



* All the attachment types can also be delivered with welded plates as per your specification! All types on request!

Attachments classification

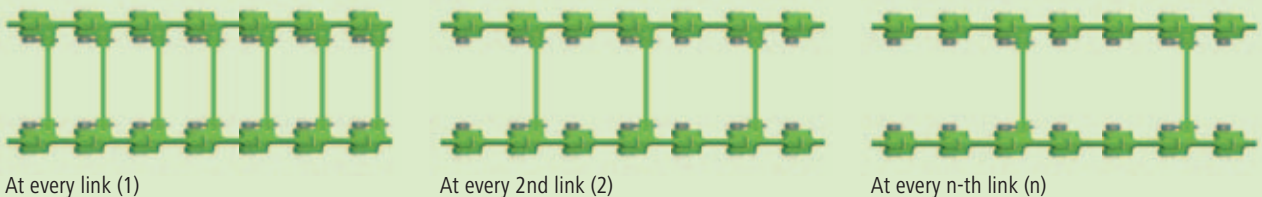

Forked-link chains are suitable for transporting powdered, flaky, grainy and fragmentary bulk materials, but not for sticky or baking bulk materials.

Examples:
flour, cement, grains, sugar, chemicals, chipped wood, chips, foodstuff, animal feed etc.

Advantages

- simple and robust construction, high operational safety
- lower space requirement
- horizontal, inclined and vertical conveyor possible
- explosion safety through slow conveyance without recirculating the material

Disadvantages

- limitation of use regarding suitable conveyance materials
- no chunky, fibrous or sticky bulk materials

Drive wheels for forked-link chain **FORKY**



Properties:

- multi-part design
- tooth flanks inductively hardened
- the sprocket elements can be swapped at the hubs fitted

Reversion wheels for forked-link chain **FORKY**




Properties:

- single-part design
- contact surface inductively hardened

Trough chain conveyor


with RUD fork link chain

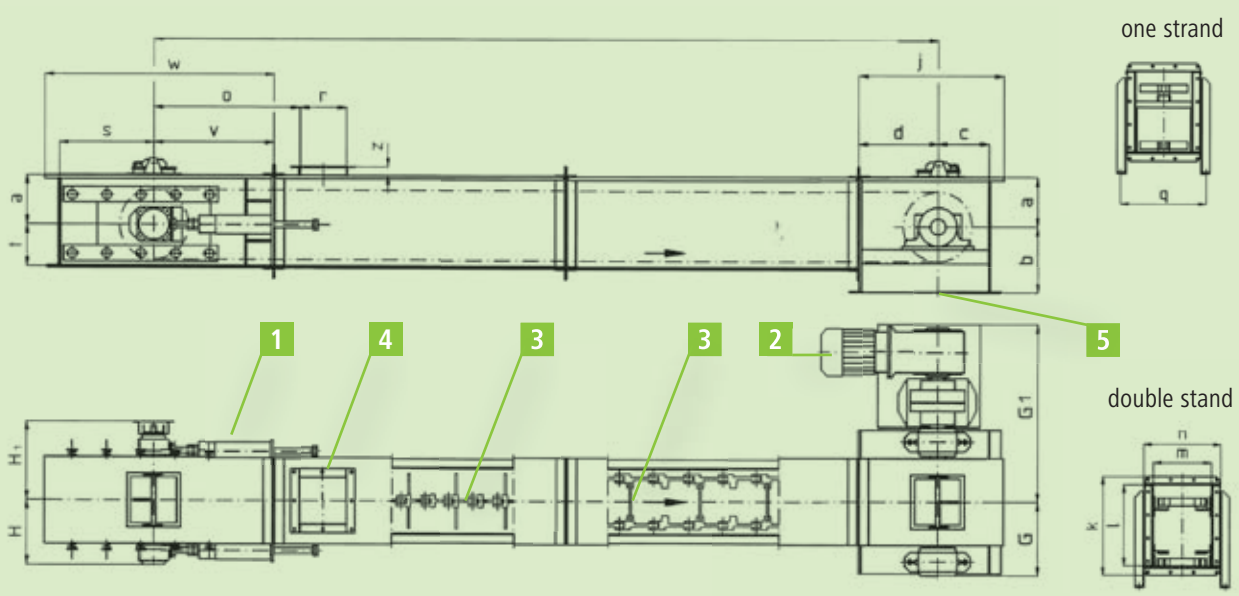

Trough chain conveyor

- 1** Tensioning station
- 2** Drive station
- 3** Conveyor chains
- 4** Feeding
- 5** Discharge


Available types:

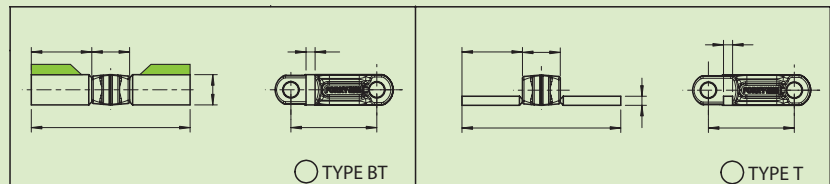

Type T for horizontal and low ascending transport max. 10°


Type BT for horizontal and low ascending transport, dusty, free flowing material

■ Type BT special (height up to 1,75 x fork link height), also for high ascending transport max. 30°

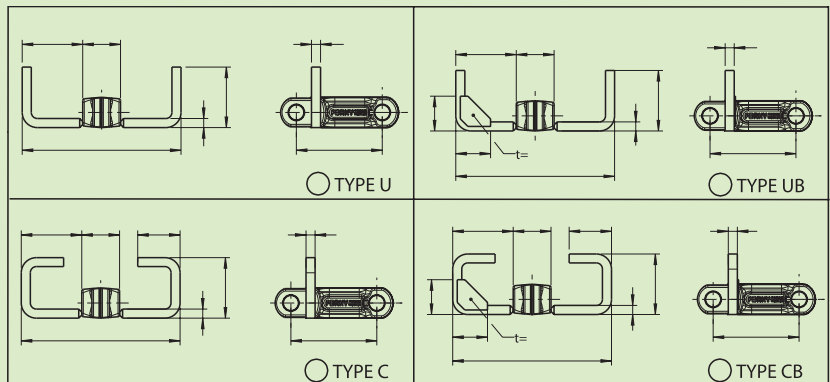

Type U and UB (UB is custom-made) for high ascending transport, 10° up to 25°

Type C and CB (CM is custom-made) for high ascending transport and dusty material, 10° up to 25°

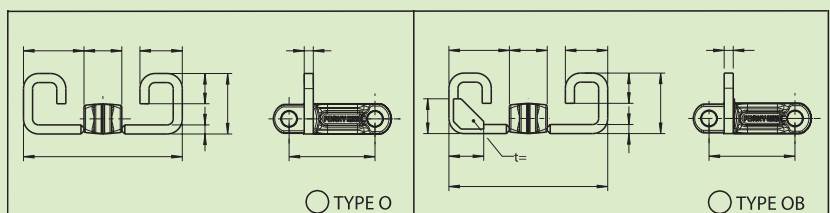

Type O and OB (OB is custom-made) for very high ascending transport, 25° up to 90°

Type C, CB, O and OB primarily for vertical transport

Trough chain conveyor

with RUD fork link chain

Applications for RUD fork link chains:

Condition of conveyed goods:


RUD fork link chains are ideally suited for transporting powdery, grainy, flaky, dusty or fragmentary material

Application:

construction-, wood-, paper-, plastic-, food and feed industry, chemical industry, mills, port cargo handling, agriculture and recycling industry


Examples of transported material:

cement, clinker, ash, wood chips, wood shavings, food and animal feed, recycled municipal waste fertilizer, gypsum, coke

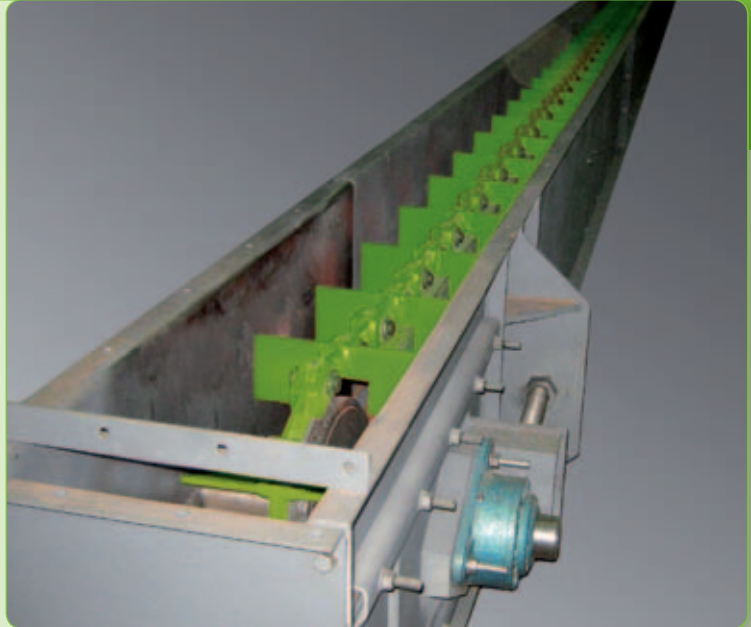

Conveying speeds (m/s) (max. values)


Material	Speed
grain	1.10
granulated material	0.80
coal, chips, soda	0.50
cement, phosphate, gypsum	0.25
clinker, petrol coke, potash	0.20
filter dust, pyrite	0.10
ash, coke, sand, quartz	0.05

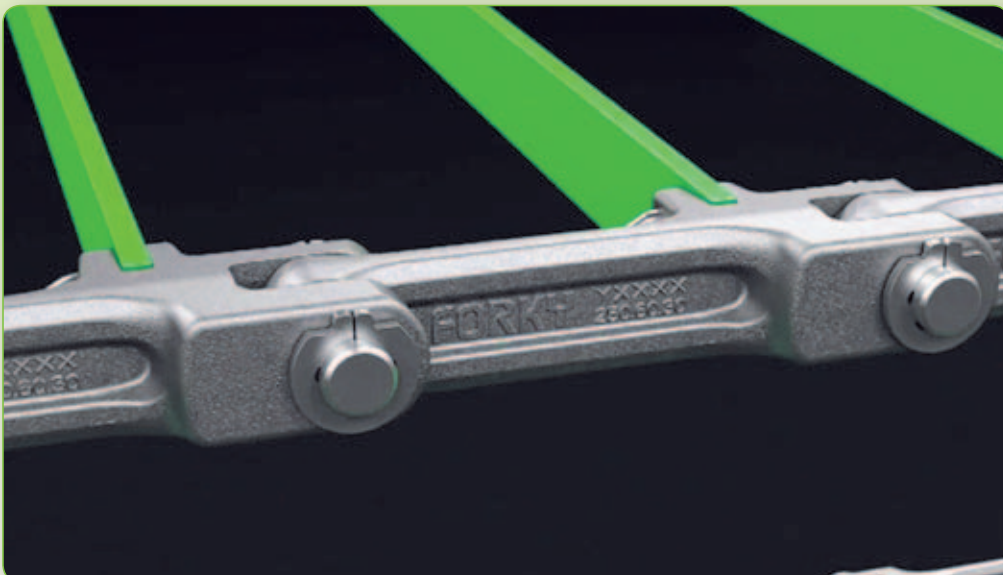



Long-lasting, easy to maintain screw conveyors are used for the dust-free, horizontal, inclined and vertical transport of fine-grained and floury materials. Suitable adaptations are made to handle coarse-grained, higher temperature, abrasive or poorly flowing materials. Screw conveyors also offer the option of multiple inlets and outlets. Various versions handle not only the transport of bulk materials but also emptying, metering, loading, screening and mixing.

Trough screw conveyor

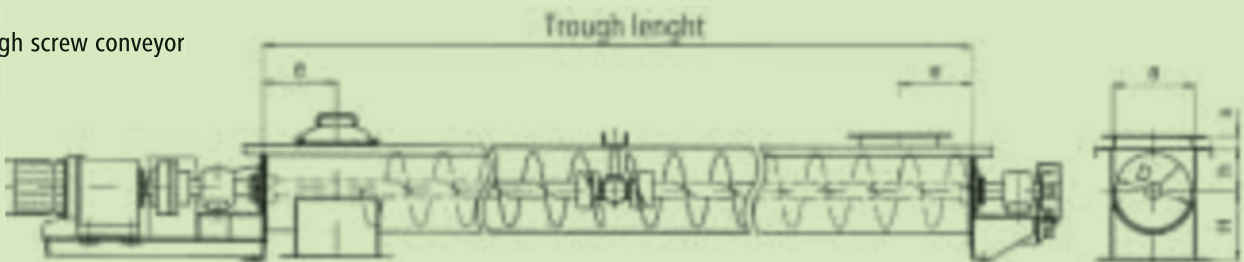


Conveying capacities for horizontal conveyors, reference values for approx. 35 % filling

Diameter	D	200	250	315	400	500	630	800	1000	1250
Speed	[U/min]	100	90	80	71	63	50	40	32	25
Conveyance capacity	[m ³ /h]	9	17	34	59	93	136	195	281	393

Dimension

Diameter	D	200	250	315	400	500	630	800	1000	1250
Trough	a	220	270	335	425	525	660	830	1040	1290
	h	112	140	180	224	280	355	450	560	710
	x	52	52	52	53	53	63	74	74	84
	H	190	225	265	315	375	450	560	670	800
	e	200	240	280	330	390	470	560	680	820

Tubular screw conveyor

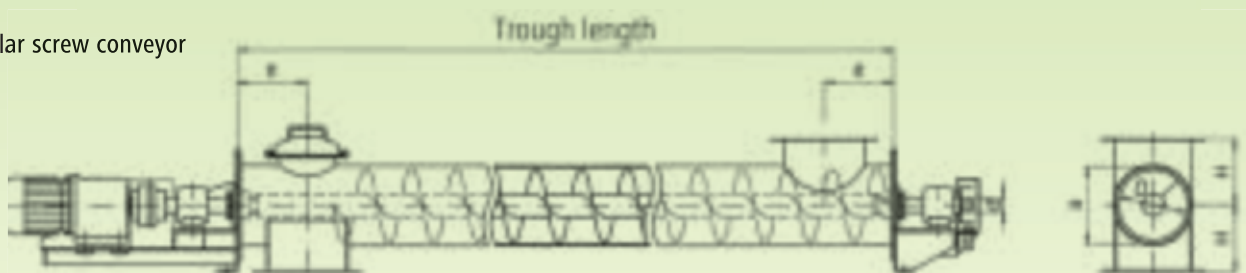

Conveying capacities for horizontal conveyors, reference values for approx. 50 % filling

Diameter	D	140	190	240	290	370	470	570
Speed	[U/min]	112	100	90	80	71	63	50
Conveyance capacity	[m ³ /h]	5	13	23	45	81	131	195

Dimension

Diameter	D	140	190	240	290	370	470	570
Tube-shaped trough	a	160.3	210.1	263	312.7	393.8	495.4	595.4
	H	160	190	225	265	315	375	450
	e	170	200	240	280	330	390	470



The **conveyor trough** in trough **screw conveyors** is manufactured as a torsionally rigid sheet metal housing made of standard section lengths with connecting flanges, to which are bolted sturdy cover plates, there is also an inspection door above the outlet. Abrasive materials can be handled by using manganese alloy steel, hard surface welding, fusion-cast basalt linings or material padding. Split end walls are bolted to the ends of the trough. This makes it easy to dismount the screw shaft once the metal cover plates have been removed.


The **conveyor trough** in **tubular screw conveyors** consists of a stable tube with an inspection door above the outlet. One-piece end walls are bolted to the ends of the trough. These are suitable for supporting the conveyor. Intermediate supports are only required about every 6 meters. They are supplied loose for mounting during assembly. The shaft exit points are usually sealed by gray cast iron stuffing boxes.

The **screw shaft** is designed as a solid shaft or a rigid tubular shaft with integrated end journals and a welded-on screw thread. The end bearings are pedestal bearings with antifriction-bearing inserts. When a screw shaft requires intermediate bearings for longer conveying distances. These are designed as easily replaceable units, the torque is transmitted by bolted couplings.

We supply a plain bearing as standard with replaceable two-part, gray cast iron bearing shells. They can be set up for grease gun or central lubrication according to the operational conditions. On request, we also supply antifriction bearings with split roller bearings in a sealed, grease-filled suspended housing. The drive comprises a standard geared motor unit.

As a **safety device**, a speed governor detects the operational status of the screw conveyor.

Additional **accessories** are available.

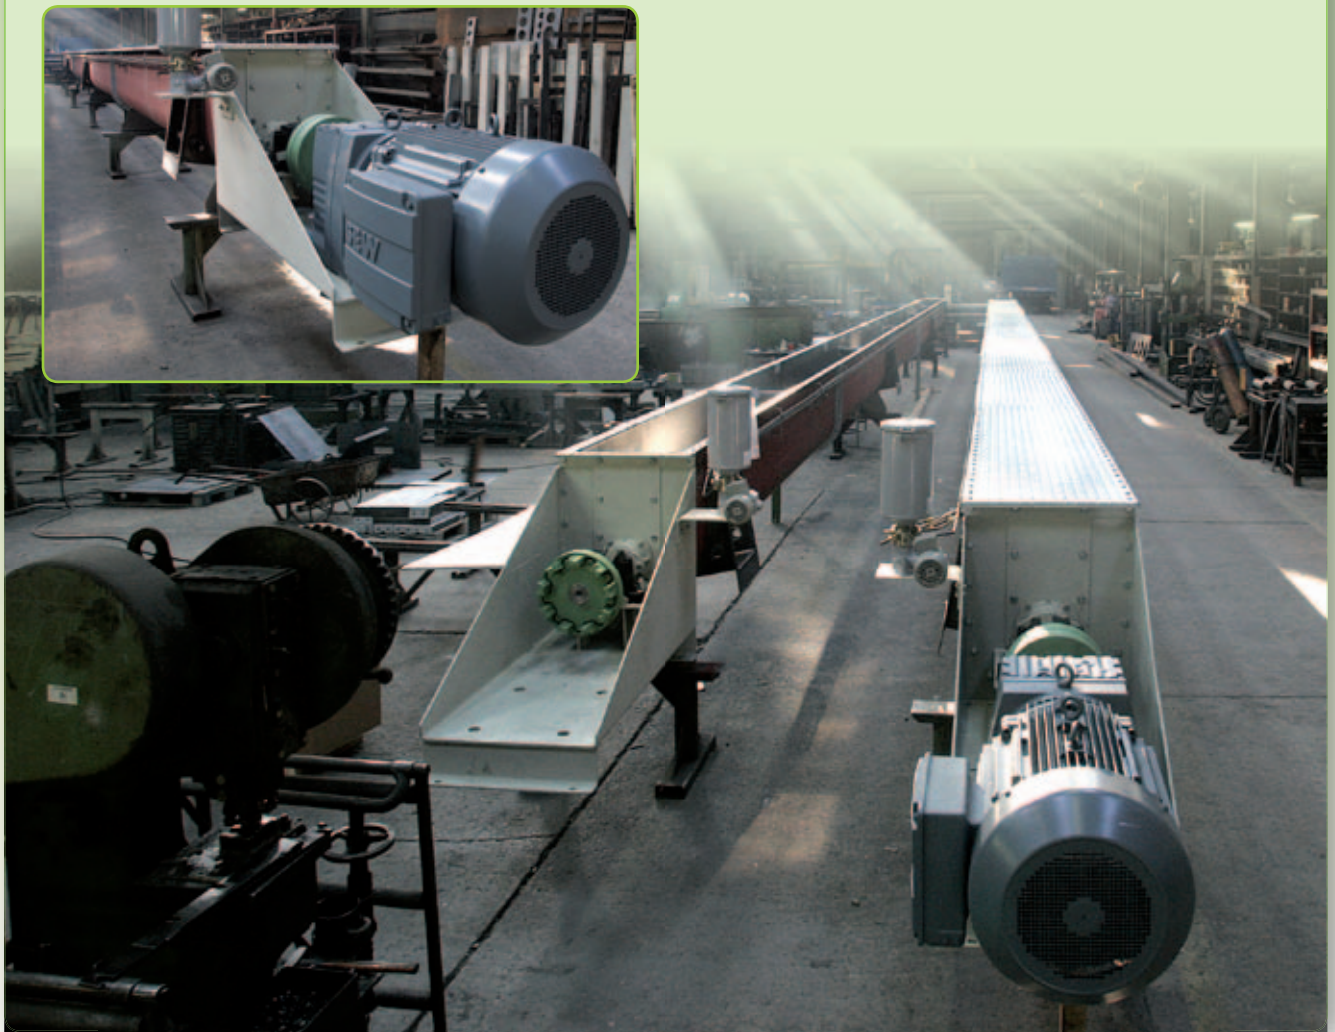

General instructions

installation and operation



The adjustability of the deflection should at least be 3 link divisions (compensation of the setting process when running the chain or when chain abrasion takes place).

The usable tensioning distance should be determined after taking into account the length of the loop and the aggressive strain, which affects the chain.

Securing the round link steel chains against excess strain or getting blocked by coarse or foreign bodies by means of suitable safety coupling, shear pin or on the drive.


When assembling the sprocket wheels or pulley blocks as well as when manufacturing buckets / bucket attachment and when attaching insertion rails at the return station, accurate adherence to installation dimension and tolerances specified in the respective installation drawings is the prerequisite of proper functioning.

Adhere to the constant initial tension using springs or weights in adjustable tensioning devices, where the size of the chain pre-tensioning force must be coordinated as per the specifications of the respective conveyor. During their complete service life, the chains must be under the correct initial tension. Loose chains give rise to difficulties.

During all the system constructions, the corresponding accident prevention regulations must be considered.


The bulk material to be transported must be supplied in such a way that equal distribution is ensured across the width of the buckets and all the chain loops are equally tensioned through the bulk material and the tractive force. In case of lateral feed, corresponding precautions must be taken.

Unequal loop stress leads to unequal increase in division due to the wear of individual chain loops; this results in the slanting of the buckets, which in turn results to faults at the return station.

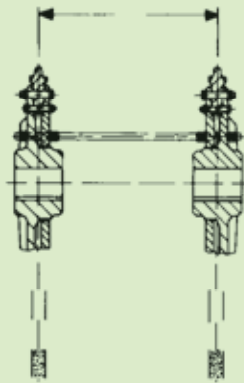

Leave distance "a" by means of 2 limiting screws during assembly! (corresponding bores at the wheels available, no RUD delivery for limiting screws).

Wheels that are grooved pair-wise and marked using colours must be put on a shaft together.

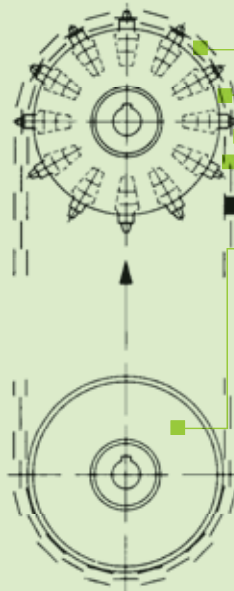

The welded joints of the (vertical) chain links must point at the wheel centre.


Vertical chain link

Welded joint

Deflection

In case of toothed drive: chains should lightly touch the sprockets when circulating.

In case of un-toothed drive: provide initial tension to the chain.

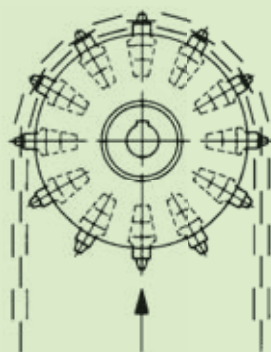

In case of replacements: here, replace individual teeth without taking off the chain.

When replacing the chains (setting up a replacement), the chain locks and the individual teeth must also be replaced.

The wear state of the chains is reached in case of permissible increase in division due to wear of about 3.5 %.

After an abrasion of 1.5 %...2.0 %, teeth should be used with increased link support.

Maintenance and monitoring

Assembly instructions

of conveyor systems in RUD system



RUD conveyor chains – highly wear-resistant– are hard-wearing due to their simple structure assembly and hence require very less maintenance. The following points must be observed with regard to high operational safety:

Lubrication: RUD conveyor chains – highly wear-resistant – do not normally require lubrication. Such chains must however be lubricated with standard engine oil (not grease), which do not come in contact with the bulk material or aggressive dusts etc. and hence formation of lubrication gel paste in the joints cannot be safely ruled out. Dirty chains should be cleaned before re-lubrication.

Initial tension: the chain tensioning must be checked periodically, especially during the start-up phase of new chains and/or in case of large loop lengths. It must be tensioned only to the extent necessary for the proper functioning of the chain and carriers during normal operating conditions. In case of multi-belt conveyors, the initial tensioning force of all the chain loops must be equal. Unnecessary high initial tensioning force reduces the service life.

Monitoring: chains, locks, wheels, sprockets and flange parts must be checked at periodic intervals for damages, corrosion and unusual wearing parts, and the conveyor elements for deflection and the like. While doing so, attention must be paid to the state of the wearing and safety parts. Damages detected must be immediately rectified.

Wear: round link steel chains and wheel gearing wear out together up to the wear state under normal conditions. This is reached if the chain links at the driving gear run jerkily under stress due to the abrasion of the chain and simultaneous normal chain tensioning or come off suddenly, i.e. are coves off over the normal break-off point. If the distances between the axes is large, the bulk material is heavily worn out or corroded, in case of high speed, heat influence etc., the chain can run jerkily at the driving gear although the measured increased division due to abrasion is still less than approximately 1.5 %. In this case, the wheel gearing is worn out due to the especially high stress and only this must be replaced - but simultaneously at all the driving gears. In principle, the new round link steel chains must only be used along with the new wheel gearing. Round link steel chains, whose average link thickness at any location has reduced by more than 10 % of the nominal thickness, must be removed. (Average link thickness = mean of 2 dimensions taken perpendicular to each other at the maximum weakened cross-section).


In case of necessary chain reductions, level links must be cut out at the belts to be shortened. Shorten chain belts to odd number of links only, in order to get level starting and final links. The chain links must be **carefully cut** using cutting discs and without damaging the neighbouring links. Avoid heat influences on links not affected by the cutting at all costs.


Welding works: in principle, welding processes should not be carried out at the round link steel chains, chain locks or deeply case-hardened components. It is not permissible to use the chain as earthing connection for electro-welding work at the steel construction.

In case of single and multi-belt conveyors: the welded joints of the chain links at the level of the gear must point at the driving gear; the position of the other links is arbitrary. Make sure that the installation position of the chain locks for the sprocket wheels is correct - coach bolt parallel to the sprocket wheel axis (also applicable for pocket wheels and striation sprockets). Install carefully and tighten the screws (strength class 8.8) using torque spanners. After a specific period, re-tighten the screws once again. Assembly for FA flat lock: link U brackets, hammer in locking bolts and secure with a locking pin.

Thread dimension	Tightening torque	
	(Nm)	(Lbf ft)
M 6	10	7
M 8	25	18
M 10	49	35
M 12	85	62
M 14	135	98
M 16	210	152
M 18	300	217
M 20	425	307
M 22	580	420
M 24	730	528
M 27	1100	796
M 30	1450	1049
M 33	1900	1374
M 36	2450	1772

Permissible screw tightening torques for screw quality class 8.8 with total drive value $\mu_{ges} = 0.14$.

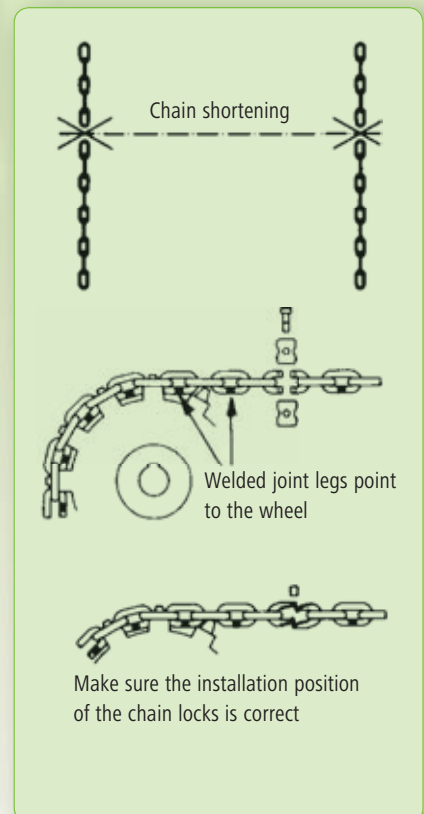

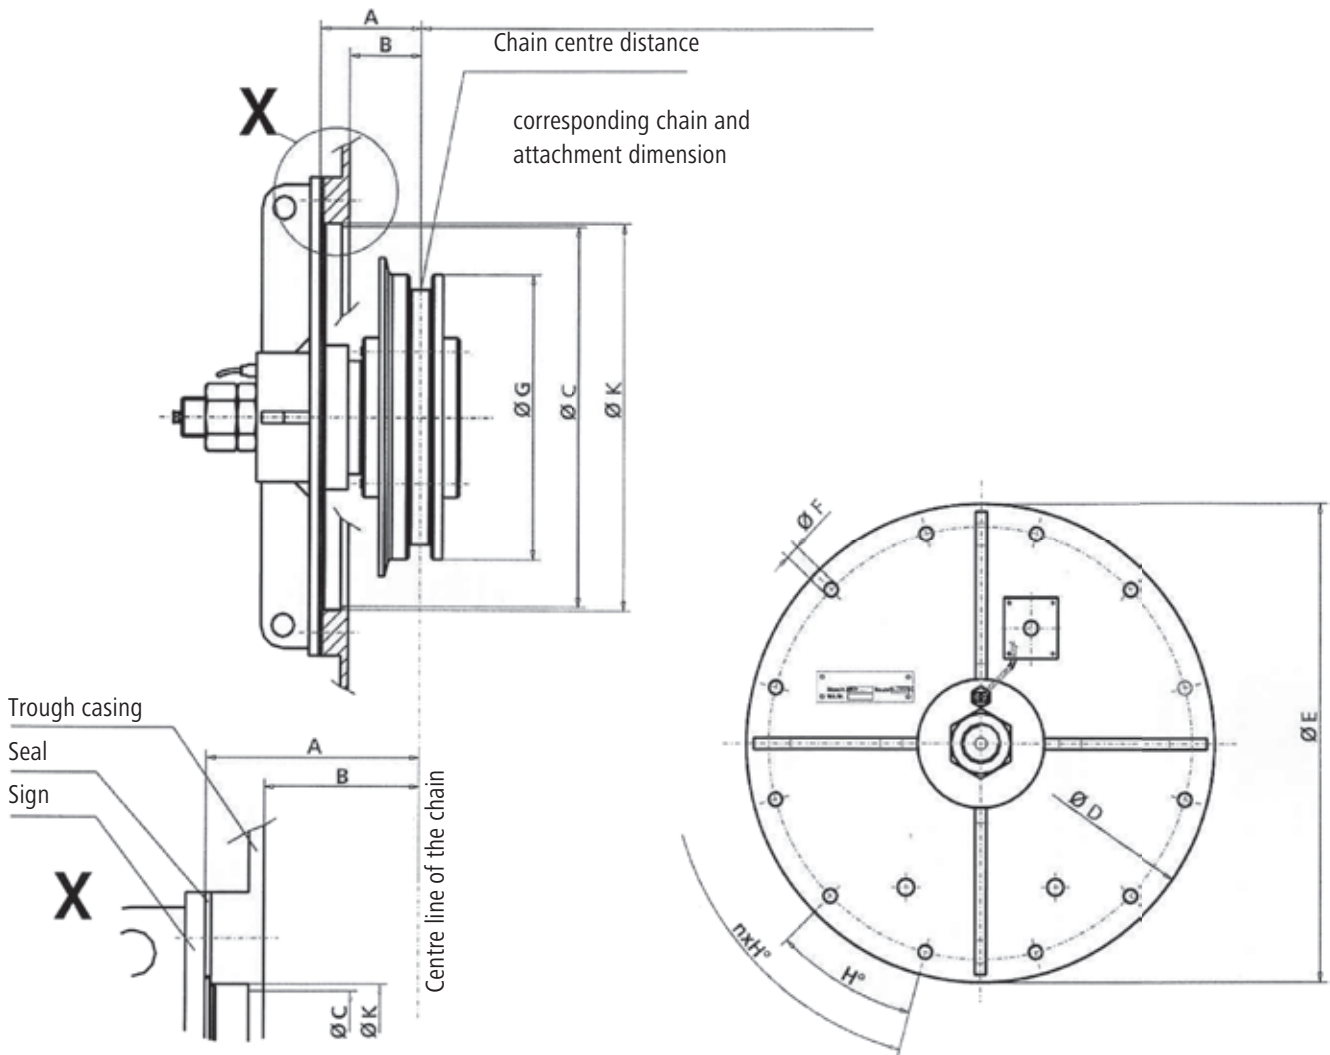


Connecting and functional dimensions

Dimension mm	n (number of bores in the plate):	
A	Chain type and dimension:	
B	Attachment type and dimension:	
Ø C	RUD-Ketten Rieger & Dietz GmbH u. Co. Friedensinsel D-73432 Aalen GERMANY Tel.: +49 (0) 7361 504-1457 Fax: +49 (0) 7361 504-1523 e-mail: conveyor@rud.com	Dimension sheet Pulley blocks - flying - for using underwater with bearing shield (SO11)
Ø D		
Ø E		
Ø F		
Ø G		
H°		
Ø K		

ATTENTION:
Other dimensions and designs on request.

SOI 2/2

Dimension sheet

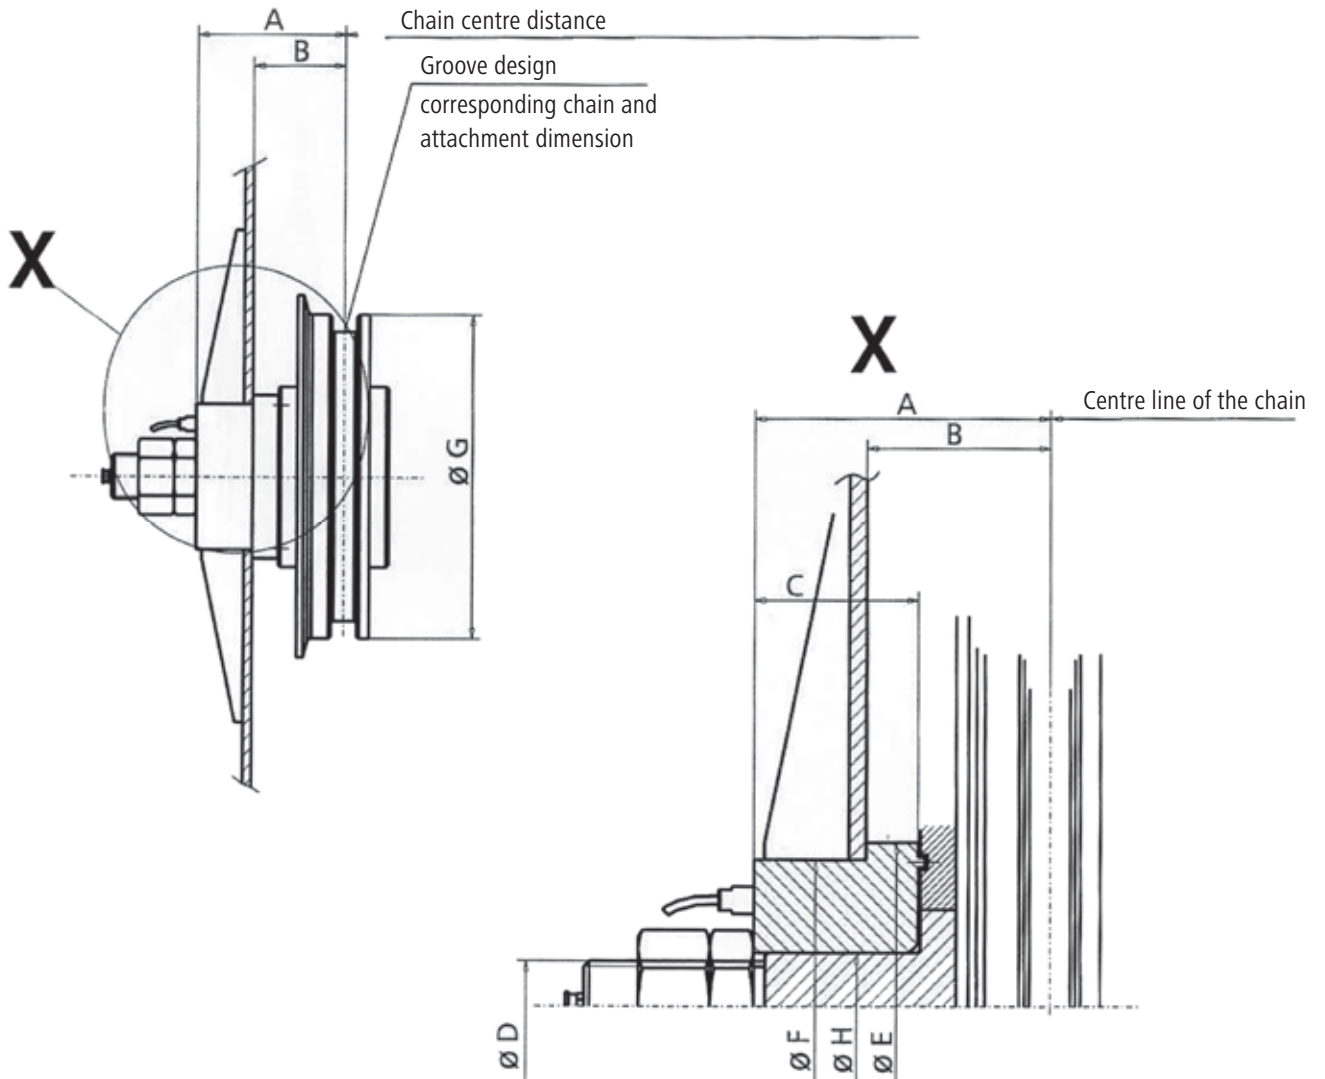

Connecting and functional dimensions


	Dimension mm	
A		Chain type and dimension:
B		Attachment type and dimension:
C		RUD-Ketten
Ø D		
Ø E		Rieger & Dietz GmbH u. Co.
Ø F		Friedensinsel
Ø G		D-73432 Aalen
Ø H		GERMANY
		Tel.: +49 (0) 7361 504-1457
		Fax: +49 (0) 7361 504-1523
		e-mail: conveyor@rud.com
		Dimension sheet
		Pulley blocks - flying - for using underwater with bearing shield (SOI2)

ATTENTION:
Other dimensions and designs on request.

ROUND STEEL CHAIN
 CHAIN CONNECTORS
 SPROCKET WHEELS
 ATTACHMENTS
 SCRAPER BARS
 REVERSION WHEELS
 POCKET WHEELS
 FORKED CHAINS
 BUCKET ATTACHMENTS
 CENTRAL CHAINS
 BUCKET ELEVATORS
 CONVEYOR SYSTEM

Reversing wheel type A-B-C

Hubs / bore dimensions

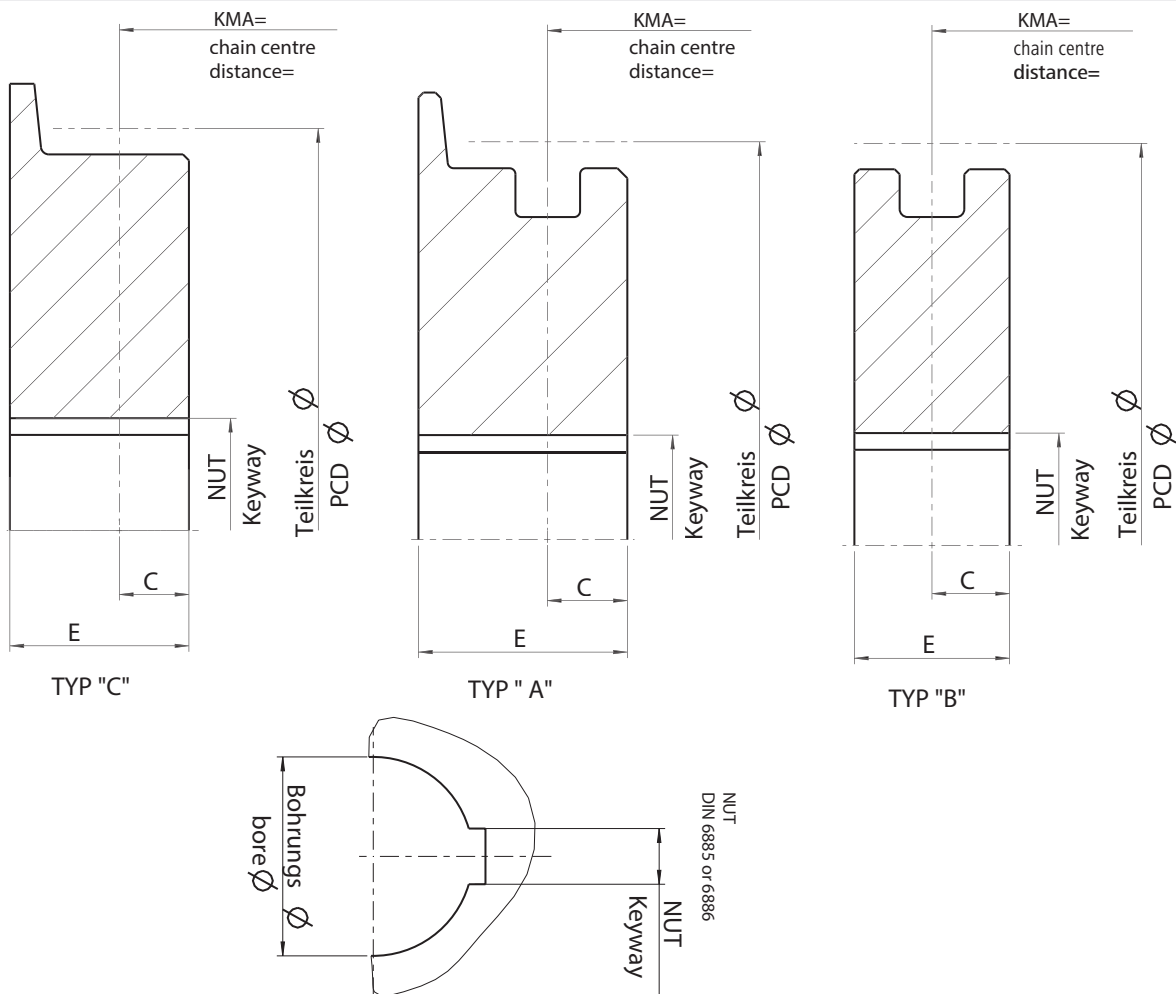

Reversing wheel type:		RUD-Ketten Rieger & Dietz GmbH u. Co. Friedensinsel D-73432 Aalen GERMANY Tel.: +49 (0) 7361 504-1457 Fax: +49 (0) 7361 504-1523 e-mail: conveyor@rud.com	Pulley blocks type A-B-C
corresponds to Z =			
Pitch circle Ø			tested: 001-F80888-P07
Chain:			
Bore Ø			
Hub length E			
Part length C:			
NUT DIN 6885			
NUT DIN 6886	(from inside to outside)	Offer no.:	
Keyway DIN 6886	(from outside to inside)	Customer release:	
Date:		Signature:	

RUD Ketten

Rieger & Dietz GmbH u. Co. KG
Abt. Fördern & Antreiben
Friedensinsel
D-73432 Aalen

Tel.: +49 (0) 73 61/5 04-14 57
Fax: +49 (0) 73 61/5 04-15 23
conveyor@rud.com
www.rud-conveyor-systems.com






Name:*		Company:*	
Email:*		Road:*	
Telephone:*		Post code:*	
Fax:		Place:*	
Project:		<input type="checkbox"/> New construction	<input type="checkbox"/> Reconstruction
Bulk material designation:*			
Bulk material bulk density [t/m3]:*			
Bulk material properties	Corrosion:	<input type="checkbox"/> high	<input type="checkbox"/> medium <input type="checkbox"/> none
	Abrasion:	<input type="checkbox"/> high	<input type="checkbox"/> medium <input type="checkbox"/> none
Granularity/dimension:		mm max.	mm min.
Moisture content:		Temperature [°C]:	
Conveyance capacity max. [t/h]:*		Speed [m/s]:	
Daily operating hours [h]:		Annual operating hours [h]:	
Dimension between axes [m]:*	trough width [mm]:*	or conveyor width [mm]:*	
Conveyor:	Assignment of material to be transported:	Type of conveyor:	
<input type="checkbox"/> on lower run	<input type="checkbox"/> regular	<input type="checkbox"/> Ash remover <input type="checkbox"/> Coaling	
<input type="checkbox"/> on upper run	<input type="checkbox"/> irregular	<input type="checkbox"/> Trough conveyor <input type="checkbox"/> Bunker discharge	
Chain centre distance [mm]:		drive power requirement [kW]:	
Chain sprocket diameters [mm]:		Max. Operating force/ chain strand [kN]:	
Line profile:*			
Please add detailed drawing with the necessary dimensions.			
Profile examples:			
Additional specifications / additions: :			
Annexes:			

ROUND STEEL CHAIN
 CHAIN CONNECTORS
 SPROCKET WHEELS
 ATTACHMENTS
 SCRAPER BARS
 REVERSION WHEELS
 POCKET WHEELS
 FORKED CHAINS
 BUCKET ATTACHMENTS
 CENTRAL CHAINS
 BUCKET ELEVATORS
 CONVEYOR SYSTEM

RUD Ketten
 Rieger & Dietz GmbH u. Co. KG
 Abt. Fördern & Antreiben
 Friedensinsel
 D-73432 Aalen

Bucket conveyors:
 Tel.: +49 (0) 531 23 729-14
 Fax: +49 (0) 531 23 729-10
 vertrieb@herfurth-engelke.de

Components:
 Tel.: +49 (0) 73 61/5 04-14 57
 Fax: +49 (0) 73 61/5 04-15 23
 conveyor@rud.com

Name:*		Company*	
Email:*		Road:*	
Telephone:*		Post code:*	
Fax:		Place:*	
Project:		<input type="checkbox"/> New construction	<input type="checkbox"/> Reconstruction
Bulk material designation:*			
Bulk material bulk density [t/m3]:*			
Granularity/dimension:		mm max.	mm min.
Moisture content:		Temperatur [°C]:	
Conveyance capacity max. [t/h]:*		Speed [m/s]:	
Daily operating hours [h]:		Annual operating hours [h]:	
Dimension between axes [m]:*		Mounting of buckets:*	
		<input type="checkbox"/> shouldered <input type="checkbox"/> lateral	
Bucket designation:*			
Bucket content [l]:*		Bucket weight [kg]:*	
Axle drive shaft rotation [rpm]:		Please add the drawing of the bucket conveyor and the bucket.	
Diameter of sprocket wheels [mm]:			
Bucket attachment:			
<input type="checkbox"/> System „65“		<input type="checkbox"/> System „2win“	
<input type="checkbox"/> System „SWA“		<input type="checkbox"/> „Central chain“ system	
<input type="checkbox"/> other bucket attachment: _____			
Bucket specification (please add the dimensioning)			
 <p>Bucket width</p>		 <p><input type="checkbox"/> Bucket type 1</p>	
		 <p><input type="checkbox"/> Bucket type 2</p>	
Casing dimension: (please add the dimensioning)			
 <p><input type="checkbox"/> Case cavity</p>		 <p><input type="checkbox"/> Double cavity</p>	
Additional specifications / additions: _____			

RUD Ketten

Rieger & Dietz GmbH u. Co. KG
Abt. Fördern & Antreiben
Friedensinsel
D-73432 Aalen

Tel.: +49 (0) 531 23 729-14
Fax: +49 (0) 531 23 729-10
vertrieb@herfurth-engelke.de

Company:	Date:
Responsible:	Email:
Address:	
Tel./Fax:	Signature:
Project	
Material to be transported:	
Bulk material properties:	
Corrosion:	<input type="checkbox"/> high <input type="checkbox"/> medium <input type="checkbox"/> none
Abrasion:	<input type="checkbox"/> high <input type="checkbox"/> medium <input type="checkbox"/> none
Granularity/dimension:	mm
Speed [t/m³]:	Temperature [°C]:
Moisture content:	Requested conveyance capacity [t/h]:
Conveyance speed [m/s]:	
Total daily service life:	Per year [h]:
Dimension between axes [m]:	Angle of gradient [degree]:
Trough width [mm]:	
Conveyor on lower run	Conveyor on upper run
Assignment of material to be transported?	Regular: <input type="checkbox"/> Irregular: <input type="checkbox"/>
a) Line profile with specification of the location of the bulk material task and removal with dimension specification b) Bunker discharge (attach the dimensioned drawing)	
Chain sprocket diameters [mm]:	
Drive power requirement [kW]:	
Max. Operating force per chain strands [kN]:	
<input type="checkbox"/> New construction <input type="checkbox"/> Reconstruction (specify available casing dimension)	

In case of special requirements, please enclose a specification or a sketch.

RUD Ketten

Rieger & Dietz GmbH u. Co. KG

Abt. Fördern & Antreiben

Friedensinsel

D-73432 Aalen

Tel.: +49 (0) 73 61/5 04-14 57

Fax: +49 (0) 73 61/5 04-15 23

conveyor@rud.com

www.rud-conveyor-systems.com

Company:	Date:
Responsible:	Email
Address:	
Tel./Fax:	Signature:

RUD scraper bars are always optimally adapted to the requirements and operating conditions specified to us by the customer. We produce scraper bars as per the specifications of the customers, provided that no consultation or support is necessary. Alternatively, we suggest an optimal scraper version based on an intensive consultation, which is developed in the dialogue.

The following information is hence necessary and evaluated by us:

Clear trough width of the conveyor: _____

Exact line profile of the conveyor: _____

Trough bottom material: _____

Trough bottom design: _____

Chain centre distance _____

Maximum occurring / requested conveyance capacity: _____

Conveyance speed [m/s]: _____

Bulk material properties:	Dampness:	Grain size:
	Bulk density:	Angle of friction:

In case of special requirements, please enclose a specification or a sketch.

RUD Ketten

Rieger & Dietz GmbH u. Co. KG

Abt. Fördern & Antreiben

Friedensinsel

D-73432 Aalen

Tel.: +49 (0) 73 61/5 04-14 57

Fax: +49 (0) 73 61/5 04-15 23

conveyor@rud.com

www.rud-conveyor-systems.com

Single strand

Verschiedene Arten der Verbindung Different types of the connection					
<input type="radio"/> Variante A Type A <p>Bolzen Pin</p> <p>Schließring Locking ring (Circlip)</p>	<input type="radio"/> Variante B (Sondervariante) Type B (Special design) <p>Kopfbolzen Head pin</p> <p>Spannstift Locking pin</p> <p>Stellring Adjusting ring</p>	<p>TYPE BT</p>	<p>TYPE T</p>	<p>TYPE U</p>	<p>TYPE UB</p>
<input type="radio"/> Mitnehmer an jedem Glied Attachment at every link 		<p>TYPE C</p>	<p>TYPE CB</p>	<p>TYPE O</p>	<p>TYPE OB</p>
<input type="radio"/> Mitnehmer an jedem 2. Glied Attachment at every 2nd. link 					
<input type="radio"/> Mitnehmer an jedem 3. Glied Attachment at every 3rd. link 					
<input type="radio"/> Mitnehmer an jedem ___ten Glied Attachment at every ___ link 					

Double strand

<input type="radio"/> Mitnehmer an jedem Glied Attachment at every link 	<input type="radio"/> Variante A Type A <p>Bolzen Pin</p> <p>Schließring Locking ring (Circlip)</p>	<p>TYPE H</p>	<p>TYPE HB</p>
<input type="radio"/> Mitnehmer an jedem 2. Glied Attachment at every 2nd. link 	<input type="radio"/> Variante B (Sondervariante) Type B (Special design) <p>Kopfbolzen Head pin</p> <p>Stellring Adjusting ring</p> <p>Spannstift Locking pin</p>	<p>TYPE HV</p>	<p>TYPE HW</p>
<input type="radio"/> Mitnehmer an jedem 3. Glied Attachment at every 3rd. link 	<input type="radio"/> Variante C (Sondervariante) Type C (Special design) <p>Haltestift Fixing pin</p> <p>Bolzen Pin</p> <p>Stellring Adjusting ring</p> <p>Spannstift Locking pin</p>	<p>L profile EN 10056-__X__X__</p>	
<input type="radio"/> Mitnehmer an jedem ___ten Glied Attachment at every ___ link 			

RUD Ketten

Rieger & Dietz GmbH u. Co. KG


Abt. Fördern & Antreiben

Friedensinsel

D-73432 Aalen



Tel.: +49 (0) 73 61/5 04-14 57
Fax: +49 (0) 73 61/5 04-15 23
conveyor@rud.com
www.rud-conveyor-systems.com

RUD-ANTRIEBSRAD FORKY RUD-DRIVING WHEEL FORKY
Naben/Bohrungsmasse Hub bore dimensions

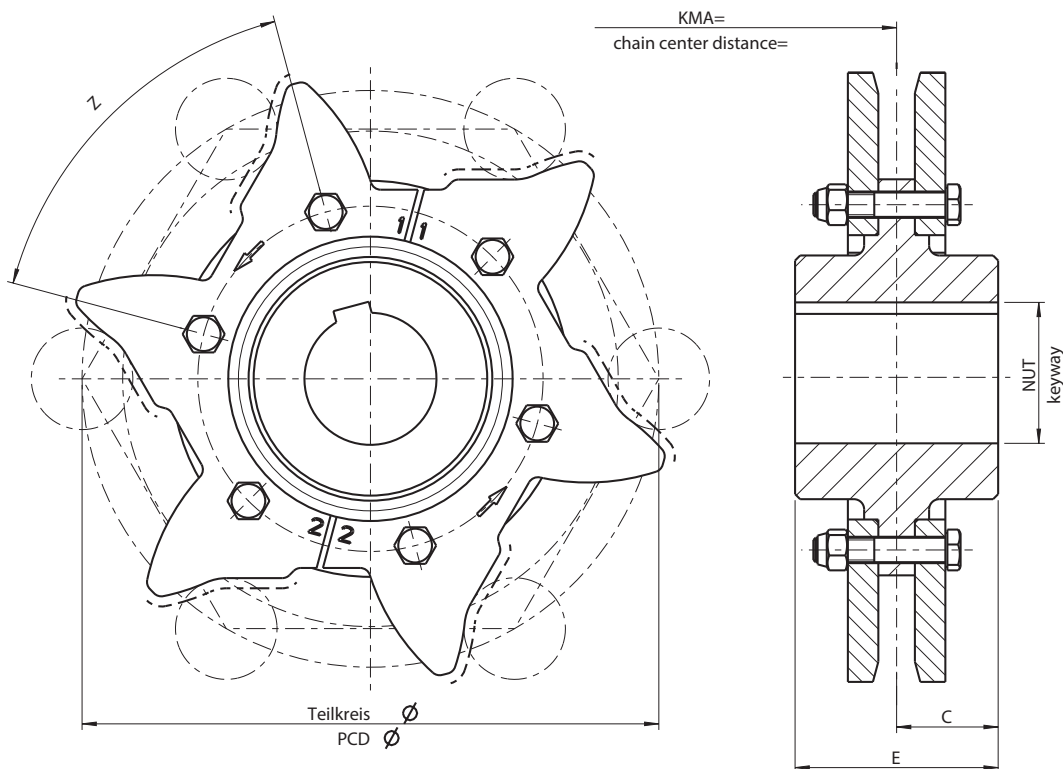


FORKY EINSTRANG/FORKY SINGLE STRAND

FORKY DOPPELSTRANG/FORKY DOUBLE STRAND



NUT/keyway
DIN 6885 or 6886



Zahnkettenrad Sprocket wheel	Zähnezahl no. of teeth	Teilkreis PCD Ø	Kette chain	Bohrungs Ø bore Ø	Nabellänge E Dimension E	Teillänge C Dimension C	NUT DIN 6885 Keyway DIN 6885	NUT DIN 6886 von innen nach aussen	Keyway DIN 6886 from outside to inside	Stellschraube adjusting screw
Angebots-Nummer: Auftrags-Nummer: offer number: order-number:		Freigabe - Bestätigung des Kunden: release-customer-confirmation:			Datum: Unterschrift: date: signature:		erstellt: 12.04.13/JJU geprüft:		FORKY RÄDER/FORKY WHEELS NABEN BOHRUNGSMASSE/HUB BORE DIMENSIONS RUD-CRATOS	
									001-F80888-P23	

Conveyor & Drives



Sling and lashing system



Conveyor systems



Hoisting and drive technology



Tyre protection chains



Slide protection chains



Military technology



Furnishings

- RUD conveyor and drive systems offer you a variety of system solutions for your case of application. Whether it is conveying, driving or lifting, we shall offer you the suitable system.
- We construct and manufacture bucket conveyors, scraper conveyors and special drive solutions for lifting, conveying or moving preferably by means of round link steel chain as the traction mechanism.
- If required, we also use sprocket chains and belts.



- Our engineers provide an extensive background knowledge and support you as a competent partner for solving your conveyance task.
- If requested, the RUD service can visit you on-site and support you during the installation, reconstruction or maintenance of your system.

- We provide a high competency in conveyor systems of heavy bulk materials in the system construction.
- We solve special problems with our drive and handling technology in the industrial and maritime environment.




Communication medium for other RUD products:

- Sling and lashing system
- Drive technology
- Military technology
- Tyre protection chains
- Lifting chains
- Non-skid chains

refer to: www.rud.com or tel. +49 7361 504-0

71
ROUND STEEL CHAIN
CHAIN CONNECTORS
SPROCKET WHEELS
ATTACHMENTS
SCRAPER BARS
WHEELS
REVERSION WHEELS
POCKET WHEELS
FORKED CHAINS
BUCKET ATTACHMENTS
CENTRAL CHAINS
BUCKET ELEVATORS
CONVEYOR SYSTEM

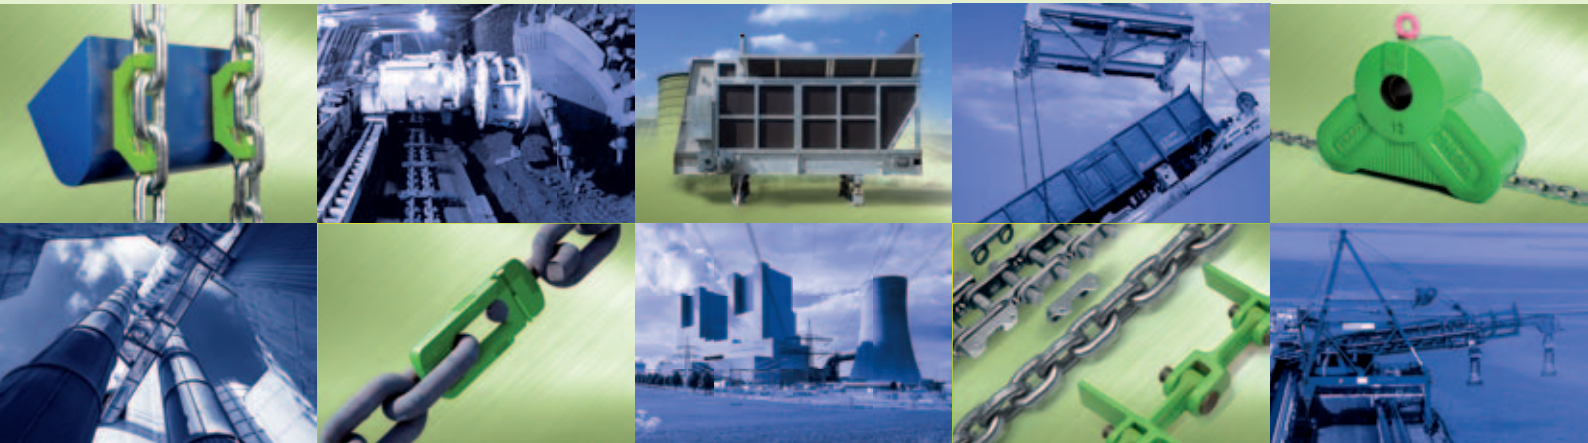

CONVEYANCE AND DRIVE TECHNOLOGY

INDUSTRIAL CHAINS

BULKOS

Whether it is complete bucket conveyor, chain conveyors or chain drive, RUD BULKOS rises to every conveyor challenge thanks to our extensive experience with the most varied bulk materials such as cement, fertilisers, stones and soils and many others.

CRATOS

As the technology leader, RUD provides components and total solutions on the basis of round link steel chains and FORKY for energy generation with coal and biomass as well as in the area of recycling. Be it material supply, ash removal or cleaning scraper, RUD CRATOS® offers the suitable solution

MINING

RUD chain locks "Powerblock" and "Dominator" are considered as benchmarks of the industrial sector throughout the world and are used in high-performance mining companies due to their high level of reliability.

RUD is the global original equipment manufacturer among the leading lifting equipment manufacturers. We also offer a variety of round link steel chains for different industries.

TECDOS®

The RUD TECDOS® team is developing and manufacturing drive solutions for turning, lifting, moving, telescoping or shifting. In addition to the component program, complete solutions are also available as the TECDOS® Omega and Pi drives.